



ATD-7466 CAR DOLLY SET OWNER'S MANUAL



Features:

- Each heavy-duty dolly has a 1,500 lb capacity (6,000 lbs. capacity for 4 dollies)
- 3" Cast steel casters
- Allows vehicle to be moved in any direction
- Great for moving cars, trucks, trailers, lawn tractors, etc. against wall or into corner
- Frees up valuable garage or shop space
- Includes grab handle for easy carrying
- Includes (2) dollies

SAFETY, ASSEMBLY AND OPERATING INSTRUCTIONS

OWNER AND/OR OPERATOR RESPONSIBILITIES:

- Read and fully understand all product instructions before use, and retain them for future reference.
- Ensure familiarity with the product's operation, safety guidelines, and limitations before using the equipment.

OPERATION:

- Operators must have a clear understanding of the product's features, operating procedures, and safety instructions prior to use.
- Safety information should be carefully reviewed and strictly followed at all times.

INSPECTION:

- Perform a visual inspection before each use. Check for signs of damage such as cracked welds, loose or missing parts, or other abnormal conditions.
- Follow any additional inspection steps outlined in the operating instructions.
- Inspect the equipment immediately if it is believed to have been subjected to an abnormal load or shock. These inspections should be carried out by a qualified technician at a specialized facility.
- Be aware that repairs may require specialized tools, training, or facilities.

DAMAGED EQUIPMENT:

- Remove from service any equipment that appears damaged, worn, or is operating abnormally.
- Do not return equipment to service until it has been properly repaired by a qualified technician at a specialized repair facility.

ALTERATIONS:

- Do not modify or alter this product in any way. Alterations can compromise safety and performance.

ATTACHMENTS AND ADAPTERS:

- The manufacturer does not supply any attachments or adapters for this product.
- Do not use any third-party attachments or adapters with this equipment.

SAFETY WARNINGS:



Failure to follow these safety warnings may result in personal injury or property damage.

- Read, understand, and follow all instructions before operating.
- **DO NOT** exceed the rated load capacity of 1,500 lbs per unit.
- Use only on a level surface. Never operate on an incline.
- **DO NOT** start the vehicle's engine or drive with the unit in place. This product is intended for hand maneuvering only.
- Lower the load to the lowest possible position before moving.
- Position the load as close to the center of the unit as possible.
- Ensure the load is centered and secured with an appropriate load restraint before moving.
- **DO NOT** not make any alterations to the product.

ASSEMBLY INSTRUCTIONS:


- Secure the 4 steel casters to each dolly using the nuts, lock washers and flat washers as shown in the parts breakdown.

OPERATION:

- Raise vehicle with an approved jack or lifting device.
- Place the auto dolly under each wheel of your vehicle, and position that the vehicle is well balanced.
- The weight capacity of each wheel dolly is 1,500 lbs. **DO NOT EXCEED THIS LIMIT.**
- **DO NOT USE ON INCLINES, MUST ONLY BE USED ON FLAT, EVEN SURFACES.**

REPLACEMENT PARTS

Not all components of this product are replacement items, but are illustrated as a convenient reference for position in the assembly sequence. When ordering parts, give model number, part number and description. Call your distributor for current pricing:

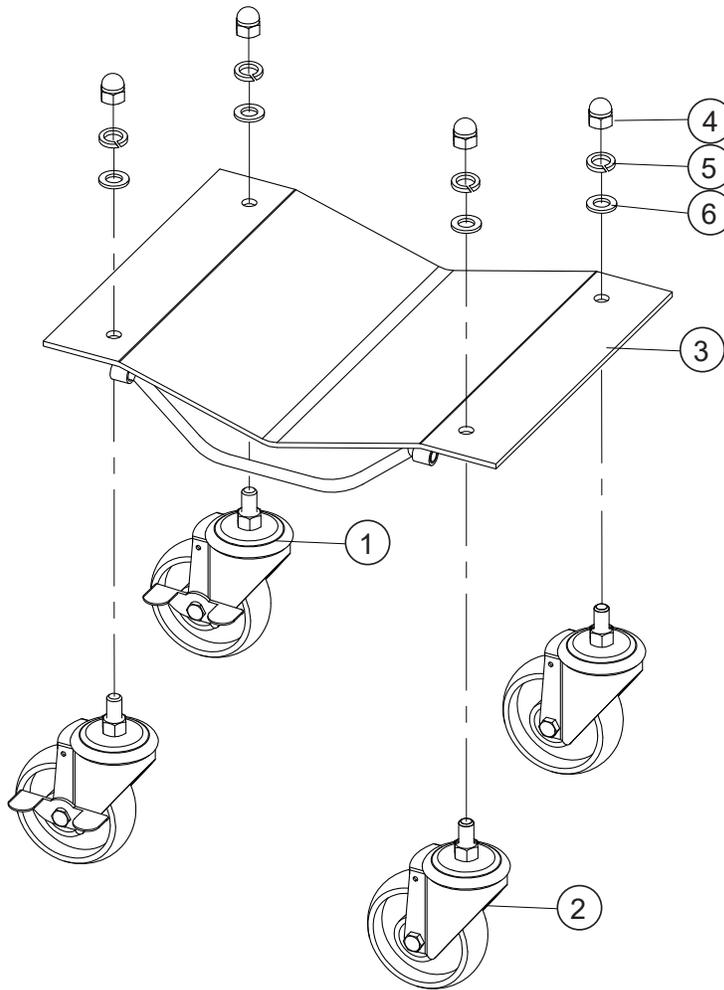

ITEM#	ORDERING PART#	PART DESCRIPTION
1	PRT7466-01	LOCKING CASTER WITH HARDWARE
2	PRT7466-02	CASTER WITH HARDWARE
3	PRT7466-03	DOLLY FRAME
4	PRT7466-H	NUT
5	PRT7466-H	LOCK WASHER
6	PRT7466-H	FLAT WASHER



WARRANTY
1 YEAR LIMITED WARRANTY

THIS WARRANTY AND CONFIRMED RECEIPT(S) SHOULD BE RETAINED BY THE CUSTOMER AT ALL TIMES

PURCHASED FROM: _____

DATE PURCHASED: _____

INVOICE/RECEIPT NUMBER: _____

Your ATD-7466 is warranted for a period of 12 months from the original purchase date.

For a period of one (1) year from your purchase date, ATD Tools, Inc. will repair or replace (at its option) without charge, your ATD product if it was purchased new and the product has failed due to a defect in material or workmanship which you experienced during normal use of the product. This limited warranty is your exclusive remedy.

To access the benefits of this warranty, contact your supplier, or point of sale directly. You may be advised to return the product under warranty, freight prepaid, to your supplier for warranty determination.

If this ATD product is altered, abused, misused, modified, or undergoes service by an unauthorized technician, your warranty will be void. We are not responsible for damage to ornamental designs you place on this ATD product and such ornamentation should not cover any warnings or instructions or they may void the warranty. This warranty does not cover scratches, superficial dents, and other abrasions to the paint finish that occur under normal use. It also does not cover normal wear items such as but not limited to brushes, batteries, drill bits, drill chucks, pads or blades.

Subject to the law in your state:

- (1) Your sole and exclusive remedy is repair or replacement of the defective product as described above.
- (2) ATD is not liable for any incidental damages, including but not limited to, lost profits and unforeseeable consequences.
- (3) The repair and replacement of this product under the express limited warranty described above is your exclusive remedy and is provided in lieu of all other warranties, express or implied. All other warranties, including implied warranties and warranties of merchantability or fitness for a particular purpose are disclaimed and, if disclaimer is prohibited, these warranties are limited to one year from your date of purchase of this product.

Some states' laws do not allow limited durations on certain implied warranties and some states' laws do not allow limitations on incidental or consequential damages. You should consult the law in your state to determine how your rights may vary.

[Affix receipt or invoice here for safe keeping]