




LIFTS & SHOP EQUIPMENT



Since 1977, ATD Tools, Inc. has focused on providing professional automotive tools and equipment at competitive prices. After over forty years, we are still committed to providing the quality tools you need at a price you can afford.

Our tools and equipment are quality control tested at the manufacturer, by independent labs and in the field to ensure they meet the performance and durability professional mechanics demand today and will continue to demand for years to come.

Two Post Auto Lifts & Accessories.....	4, 5
Four Post Auto Lifts & Accessories	6-8
Alignment Machines	8
Storage & Single Post Lifts & Accessories	9, 10
Storage Lift Scissor Jacks	10
Specialty Lifts & Accessories.....	11
Scissor Lifts & Accessories	12
Tilt Lifts & Accessories	13
Heavy-Duty Mobile Column Lifts & Accessories	14, 15
Wheel Balancers & Accessories.....	16, 17
Tire Changers & Accessories	18, 19
Power Sport Lifts & Accessories.....	20, 21
Power Sport Wheel Service.....	22
Car Rotisserie & Accessories	22, 23
Body Carts.....	24
Frame Rack Machines & Accessories	24, 25
Paint Mixing Tables.....	25
Paint Spray Booths.....	26-29
Paint Booth Heat Units.....	30
Paint Mixing Rooms & Accessories	30, 31
Power Units	31

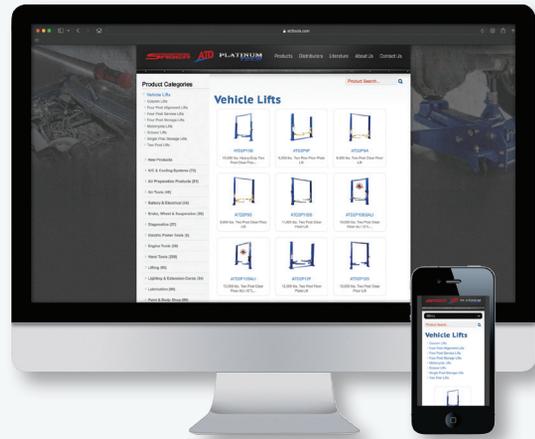

Visit us online at www.atdtools.com to view the full line of products available.

A PDF version of this catalog along with other informational PDF files are available online under the "Literature" tab.



ATD2P10BSALI 10,000 LBS. TWO POST CLEAR FLOOR ALI / ETL CERTIFIED LIFT

Features:

- ALI / ETL Certified
- Bi-Symmetric lift arms
- Low profile swing arm design
- 3-stage front arms
- Adjustable height swivel pads
- Stackable truck adapters included - 2" & 4"
- Single point lock release
- Automatic arm restraints
- Direct pull drive cylinders
- External hose guards
- Rubber door guards
- Durable powder-coat finish
- MET U/SCA certified DURO power unit

Specifications:

- Capacity: 10,000 lbs.
- Height Overall: 144"
- Width Overall w/ Power Unit: 145-1/2"
- Maximum Lift Height: 71"
- Inside Column Width: 116"
- Minimum Pad Height: 4"
- Drive Through Clearance: 104"
- Lifting Speed: 50S
- Asymmetric / Symmetric: Bi-Symmetric
- Clear Floor / Floor Plate: Clear Floor
- Short Arm Reach - min/max: 23"-45"
- Long Arm Reach - min/max: 41"-59"
- Max Load per Arm: 2,500 lbs.
- Ceiling Height Required: 145"
- Ship Weight: 1,705 lbs.
- Power: 220V, 20A, 1PH



BI-SYMMETRIC™ ASYMMETRIC OR SYMMETRIC CONFIGURATION


- 180° front arm full rotation

LOW PROFILE
PADS WITH
2.6" AND 5"
ADAPTERS

SYMMETRIC
SWING ARMS
CONFIGURATION



SINGLE POINT LOCK
RELEASE



ATD2P10BSALI



ATD2P12SALI 12,000 LBS. TWO POST CLEAR FLOOR ALI / ETL CERTIFIED LIFT

Features:

- Direct drive
- Single point lock release
- ALI / ETL Certified
- Includes SPX power unit
- Stackable truck adapters included - 2.5" & 5"

Specifications:

- Capacity: 12,000 lbs.
- Height Overall: 168-1/2"
- Width Overall w/ Power Unit: 151-5/16"
- Maximum Lift Height: 75"
- Inside Column Width: 122"
- Minimum Pad Height: 4-7/8"
- Drive Through Clearance: 109"
- Lifting Speed: 50S
- Asymmetric / Symmetric: Symmetric
- Clear Floor / Floor Plate: Clear Floor
- Front Arm Reach - min/max: 37-5/8"-57"
- Rear Arm Reach - min/max: 49"-60"
- Max Load per Arm: 3,000 lbs.
- Cable Diameter: 3/8"
- Column Size: 8-3/4" x 12-3/4"
- Column Steel Thickness: 7mm
- Carriage Steel Thickness: 7mm
- Arm Steel Thickness: 9.5mm
- Ship Weight: 2,295 lbs.
- Power: 220V, 20A, 1PH



SYMMETRIC



LOW PROFILE
PADS WITH
2.6" AND 5"
ADAPTERS



SYMMETRIC
SWING ARMS
CONFIGURATION



SINGLE POINT LOCK
RELEASE



ATD2P12SALI



ATD2P11BS 11,000 LBS. TWO POST CLEAR FLOOR LIFT

Features:

- Direct drive
- Spin-up pads and adapters
- Low profile arms
- Single-up pads and adapters
- Rubber door guards
- Three stage front arms

Specifications:

- Capacity: 11,000 lbs.
- Height Overall: 144"
- Width Overall w/ Power Unit: 137-1/4"
- Maximum Lift Height: 71-5/8"
- With Tallest Adapter: 77-5/8"
- Width Between Columns: 116"
- Minimum Pad Height: 4"
- Drive Through Clearance: 95-3/4"
- Lifting Speed: 50S
- Asymmetric / Symmetric: Asymmetric
- Clear Floor / Floor Plate: Clear Floor
- Short Arm Reach - min/max: 28-7/8"-43-7/8"
- Long Arm Reach - min/max: 49"-60"
- Cable Diameter: 3/8"
- Column Size: 7-5/8" x 12-3/8"
- Column Steel Thickness: 5mm
- Carriage Steel Thickness: 8.5mm
- Arm Steel Thickness: 8mm
- Ship Weight: 1,705 lbs.
- Power: 220V, 20A, 1PH



BI-SYMMETRIC™ ASYMMETRIC OR SYMMETRIC CONFIGURATION

- 180° front arm full rotation



ATD2P11CA SPIN-UP CRADLE ADAPTERS

Features:

- Spin-up cradle adapters (set of 4)
- Excellent for lifting from vehicle frame
- Can also use with ATD2P11BS



ATD2P9CA SPIN-UP CRADLE ADAPTERS (SET OF 4)

Features:

- Excellent for lifting from vehicle frame
- For use with ATD2P9F, ATD2P9A and ATD2P9S



TP12SDX-SPNCA SPIN-UP CRADLE ADAPTERS

Features:

- ALL Certified
- Spin-up cradle adapters (set of 4)
- Excellent for lifting from vehicle frame
- Use with ATD2P12SALI to maintain ALL certification



TP12SDX-SPNCA



ATD2P12KXCA GM 2019+, WIDER SPIN-UP CRADLE ADAPTERS (SET OF 2)

Features:

- Spin-up cradle adapters (set of 2)
- Wider design for 2019 GM Silverado and Sierra light-duty trucks
- Excellent for lifting from vehicle frame
- For use with ATD2P12F and ATD2P15S



ATD2P11DXCA GM 2019, WIDER SPIN-UP CRADLE ADAPTERS

Features:

- Spin-up cradle adapters (set of 2)
- Wider design for 2019 GM Silverado and Sierra light-duty trucks
- Excellent for lifting from vehicle frame
- Use with ATD2P11BS



ATD2P12CA SPIN-UP CRADLE ADAPTERS (SET OF 4)

Features:

- Excellent for lifting from vehicle frame
- For use with ATD2P12F and ATD2P15S



ATD2P9A TWO POST CLEAR FLOOR

Features:

- Chain driven
- Spin-up pads and adapters
- Low profile arms
- Rubber door guards



ATD2P9F TWO POST FLOOR PLATE

Features:

- Chain driven
- Spin-up pads and adapters
- Low profile arms
- Rubber door guards



ATD2P12F TWO POST FLOOR PLATE

Features:

- Chain driven
- Spin-up pads and adapters
- Low pad height



ATD2P9S TWO POST CLEAR FLOOR

Features:

- Chain driven
- Spin-up pads and adapters
- Low profile arms
- Rubber door guards



ATD2P12S TWO POST CLEAR FLOOR

Features:

- Direct drive
- Single point air lock release
- Height adapters
- External hose guards
- Low pad height



ATD2P15S TWO POST CLEAR FLOOR

Features:

- Chain driven
- Spin-up pads and adapters
- Low pad height



Model	ATD2P9A	ATD2P12F	ATD2P12S
Capacity	9,000 lbs.	12,000 lbs.	12,000 lbs.
Overall Height	142-7/8"	121-1/2"	165"
Overall Width w/ Power Unit	138"	147-7/8"	151"
Maximum Lift Height	72"	76-1/2"	72"
Width Between Columns	113-5/8"	120-5/16"	122"
Minimum Pad Height	4"	5"	5-1/2"
Drive Through Clearance	96"	109"	109"
Lifting Speed	50S	45S	50S
Asymmetric / Symmetric	Asymmetric	Symmetric	Symmetric
Clear Floor / Floor Plate	Clear Floor	Floor Plate	Clear Floor
Short Arm Reach - min/max	29" - 41"	37" - 52-1/2"	37-5/8" - 56-3/4"
Long Arm Reach - min/max	37" - 57"	Same	Same
Max. Load per Arm	2,250 lbs.	3,000 lbs.	3,000 lbs.
Ship Weight	1,370 lbs.	2,460 lbs.	2,295 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH	220V, 20A, 1PH

Model	ATD2P9F	ATD2P9S	ATD2P15S
Capacity	9,000 lbs.	9,000 lbs.	15,000 lbs.
Overall Height	111-7/8"	142-7/8"	179-3/8"
Overall Width w/ Power Unit	134-5/8"	138"	148-3/8"
Maximum Lift Height	72"	72"	76-1/2"
Width Between Columns	110-3/8"	113-5/8"	120-3/4"
Minimum Pad Height	4"	4"	5"
Drive Through Clearance	101"	96"	109-3/8"
Lifting Speed	50S	50S	45S
Asymmetric / Symmetric	Symmetric	Symmetric	Symmetric
Clear Floor / Floor Plate	Floor Plate	Clear Floor	Clear Floor
Short Arm Reach - min/max	31" - 45"	31" - 45"	37" - 52"
Long Arm Reach - min/max	Same	Same	Same
Max. Load per Arm	2,250 lbs.	2,250 lbs.	3,750 lbs.
Ship Weight	1,270 lbs.	1,370 lbs.	2,575 lbs.
Power	220V, 20A, 1PH	220V, 20A, 1PH	220V, 20A, 1PH



ATD4P12CA 12,000 LBS. FOUR POST SERVICE LIFT

Features:

- Cable drive
- Manual lock release

Specifications:

- Capacity: 12,000 lbs.
- Overall Length w/ Ramp: 232-1/2"
- Overall Width (outside base plates): 123"
- Lifting Height 67-1/2"
- Width Between Posts: 105"
- Width Between Runways: 36-1/2"
- Width of Runways: 19-1/4"
- Column Height: 84"
- Max Wheel Base (2 wheel): 176
- Max Wheel Base (4 wheel): n/a
- Ramp Length: 30"
- Max. Clearance Under Track: 63-1/4"
- Base Plate Dimensions: 11" x 11"
- Ship Weight: 2,255 lbs.
- Power: 220V, 20A, 1PH



ATD4P14CH 14,000 LBS. FOUR POST SERVICE LIFT

Features:

- Chain drive
- Pneumatic single point lock release

Specifications:

- Capacity: 14,000 lbs.
- Overall Length w/ Ramp: 237"
- Overall Width (outside base plates): 123"
- Lifting Height 65-1/4"
- Width Between Posts: 108"
- Width Between Runways: 0 to 41"
- Width of Runways: 20-1/4"
- Column Height: 85"
- Max Wheel Base (2 wheel): 192"
- Max Wheel Base (4 wheel): n/a
- Ramp Length: 30"
- Max. Clearance Under Track: 60"
- Base Plate Dimensions: 10.5" x 10.5"
- Ship Weight: 2,615 lbs.
- Power: 220V, 20A, 1PH




ATD4P14KCX 14,000 LBS. FOUR POST COMMERCIAL SERVICE LIFT

Features:

- High performance commercial service lift
- Durable, high quality cable lift system
- Extended rise height
- (18) locking height positions
- Narrow and wide runway mounting positions
- Single point pneumatic lock release
- Fully adjustable lock stops for easy leveling
- Slack cable safety devices
- Self-chocking approach ramps with nylon rollers
- Wheel chocks (1 pair)
- Durable powder coat finish

Specifications:

- Capacity: 14,000 lbs.
- Overall Length w/ Ramp: 252-1/2"
- Overall Width w/o Power Unit: 131-7/8"
- Overall Width w Power Unit: 142"
- Overall Height: 92-1/2"
- Max. Rise Height: 78-3/4"
- Min. Height: 7-7/8"
- Width Between Posts: 116-1/4"
- Length Between Posts: 196"
- Width Between Runways: 43" or 46"
- Width of Runways: 20"
- Max Wheel Base (2 wheel): 182-1/2"
- Max. Align Wheel Base (2 wheel): n/a
- Max Wheel Base (4 wheel): n/a
- Ramp Length: 44"
- Max. Clearance Under Runway: 69-5/8"
- Drive-Thru Clearance: 96"
- Base Plate: 10-1/2" x 9"
- Power: 220V, 20A, 1PH
- Ship Weight: 2,690 lbs.
- Min. By Size: 16' x 25'

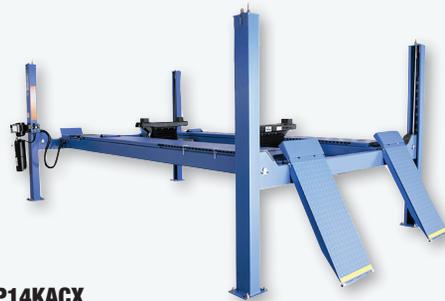

ATD4P14KACX 14,000 LBS. FOUR POST COMMERCIAL ALIGNMENT LIFT

Features:

- Durable, high quality cable lift system
- Extended rise height
- "Bolt-on" runway alignment kit
- (18) locking height positions
- Full width rear slip plates
- Slack cable safety devices
- Durable powder coat finish
- High performance commercial alignment lift
- Two turntable positions with spacer covers
- Narrow and wide runway mounting positions
- Fully adjustable lock stops for easy leveling
- Self-chocking approach ramps with nylon rollers
- Single point pneumatic lock release
- Wheel chocks (1 pair)

Specifications:

- Capacity: 14,000 lbs.
- Overall Length w/ Ramp: 252-1/2"
- Overall Width w/o Power Unit: 131-7/8"
- Overall Width w Power Unit: 142"
- Overall Height: 92-1/2"
- Max. Rise Height: 80-3/4"
- Min. Height: 9-7/8"
- Width Between Posts: 116-1/4"
- Length Between Posts: 196"
- Width Between Runways: 43" or 46"
- Width of Runways: 20"
- Max Wheel Base (2 wheel): 182-1/2"
- Max. Align Wheel Base (2 wheel): 166-3/4"
- Max Wheel Base (4 wheel): 157"
- Ramp Length: 44"
- Max. Clearance Under Runway: 69-5/8"
- Drive-Thru Clearance: 100"
- Base Plate: 10-1/2" x 9"
- Power: 220V, 20A, 1PH
- Ship Weight: 3,810 lbs.
- Min. By Size: 16' x 25'



TURNTABLE-RBSPCR
TURNTABLE, ROLLBACK SPACER (SET OF 2)

- Features:
- Use with TURNTABLE-FP14KCX
 - Provides level surface to runways
 - Handles for easy positioning
 - Metal construction
 - Durable powder coat finish



TURNTABLE-FP14KCX
TURNTABLE (SET OF 2)

- Features:
- High quality construction
 - Heavy-duty carbon steel top plate
 - Handles on base for easy positioning
 - 14" L x 14" W x 1.5" H
 - 9,000 lbs. total set capacity



TURNTABLE-FP14KCX-DK
TURNTABLE & ROLLBACK SPACERS (DELUXE KIT)

- Features:
- Use with FP14KCX-ALIGNKIT and FP14KAC-X lift models
 - Includes TURNTABLE-FP14KCX (set of 2)
 - Includes turntable rollback spacers TURNTABLE-RBSPCR



ATDRAJ7L
7,000 LBS. ROLLING AIR JACK - LOW MOUNT

ATDRAJ7H
7,000 LBS. ROLLING AIR JACK - HIGH MOUNT

- Features:
- ATDRAJ7L features a low mount design for high position jack rails
 - ATDRAJ7H features a high mount design for low position jack rails
 - 7,000 lbs. capacity
 - Smooth rolling operation
 - Protective skirts
 - Rubber height adapters (set of 2)
 - Adjustable height roller body
 - Air/Oil Hydraulic operation
 - Two locking positions



ATDRAJ8L
8,000 LBS. ROLLING AIR JACK - LOW MOUNT


ATDRAJ8H
8,000 LBS. ROLLING AIR JACK - HIGH MOUNT

- Features:
- ATDRAJ8L features a low mount design for high position jack rails
 - ATDRAJ8H features a high mount design for low position jack rails
 - 8,000 lbs. capacity
 - Adjustable height roller body
 - Two locking height positions
 - Pneumatic air bag operation (2 bags)
 - Spring-loaded roller body operation
 - Smooth "on-rail" rolling with roller bearing wheels
 - Height adapters (2 sets of 2 each)

FP14KCX-ALK AIRLINE KIT WITH FRL

Features:


- Designed for use with FP14KC-X Lift and RAJ-7K Rolling Bridge Jack models
- Includes coiled hoses, air tubing, air fittings, and quick disconnect fittings to RAJs
- Includes FRL (Filter/Regulator/Lubricator)
- Quick retrofit installation design
- Includes all mounting hardware



FP14KCX-ALIGNKIT "BOLT ON" ALIGNMENT KIT

Features:


- Designed to convert the FP14KC-X Service Lift to an Alignment Lift
- Alignment kit quickly bolts to pre-drilled holes in FP14KC-X runways
- Provides alignment to max. wheelbases of 166.7" (2 wheel) and 157" (4 wheel)
- Includes rear slip plates, center panels, turntable saddles and cutouts
- Provides a level surface from turntable cutouts to rear slip plates
- Nylon saddle pads for easy, protective turntable positioning
- Turntable spacer covers and extended height wheel stops
- Includes all mounting hardware
- Durable powder coat finish
- Turntables NOT included

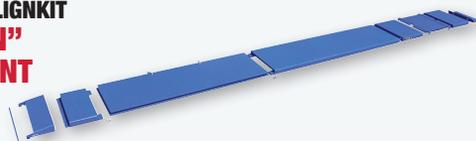

FP14KCX-24EXTKIT 24" RUNWAY EXTENSION KIT (SET OF 2)

Features:

- Use with FP14KC-X and FP14KAC-X lift models
- Lengthens runways by 24" for extended wheelbase requirements
- Extends FP14KAC-X* to 190.7" max. alignment wheelbase (2 wheel)
- *FP14KCX-24ALIGNSPCRKIT is required to extend FP14KAC-X alignment runways
- Easy bolt-on design
- Includes all mounting hardware
- Durable powder coat finish



FP14KCX-24ALIGNSPCRKIT 24" EXTENSION, ALIGNMENT SPACER KIT (SET OF 2)

Features:


- Use with FP14KCX-ALIGNKIT
- Provides elevated and level surface from extensions to runways
- Easy bolt-on design
- Includes all mounting hardware
- Durable powder coat finish



ATDALWACMB 3D IPRO IMAGE WHEEL ALIGNER SYSTEM

Features:

- High resolution, 3D cameras
- Semi-automatic, adjustable height camera boom
- Alignment software - includes data (updates available)
- Compact mini-style targets
- Wheel clamps
- Steering wheel holder
- Brake depressor
- Wheel chocks
- Mobile, multi-bay capable
- German engineered alignment software
- FRONT, REAR, ALL zoom readings
- Graph and meter screens
- Pre-installed 25+ spec years comprehensive database
- Illustration diagrams and integrated help system
- Advanced, editable customer database
- Multi-function LEDs guide setup and runout
- Vehicle inspection/worksheet screen
- Works with multiple style alignment lifts
- Computer, keyboard, mouse and color printer included

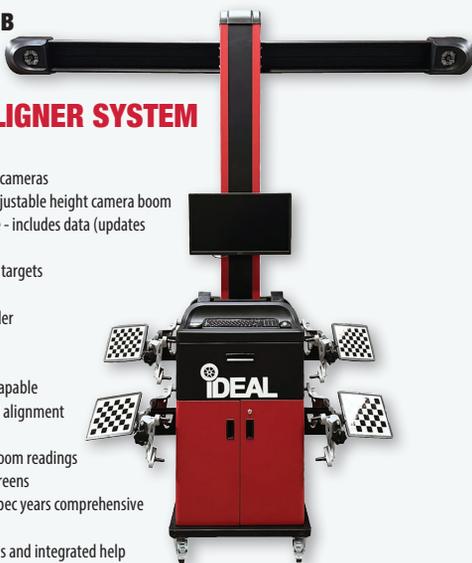

Specifications:

- Software: SureAlign 4.0
- Accuracy: 0.01 degree
- Certification: CE
- Target Size (4): Mini
- Standard Wheel Clamps (4): 13" - 25"
- Track Width: 63" - 82.5"
- Wheel Base: 71" - 177"
- Power: 110/120V, 60Hz, 15 Amp, 1 PH
- Ship Weight: 600 lbs. (2 cartons)

IWA-60-8500-HD-K 3D HEAVY-DUTY MULTI-AXLE IMAGE WHEEL ALIGNER SYSTEM

Features:

- Multi-axle floor alignment system - no vehicle lift required
- Designed to measure long vehicles and vehicles with trailers
- Dynamic LED tower guide changes shape to guide technician
- Mobile cabinet allows for side or front centered placement
- 8 each compact lightweight targets
- Convenient storage stands for wheel clamps
- Dual towers provide max view range up to 50 ft.
- Live reading screens for front and rear axle readings
- Recalls, prints current and past info for customized reports
- Includes heavy-duty turntable and drive-on floor ramp sets for quick, easy front end alignments
- Drive-over cable plates included for "drive-through" or "dead-end" set-up configurations



Specifications:

- Operating System: Windows
- Software: Techno Vector 7
- Accuracy: 0.01 degree
- Certification: CE
- Target Size (8): Standard
- Standard Wheel Clamp (8): 15" - 27"
- Cameras (Total): 4
- Lift Compatible: No
- 4 Post Hoist Compatibility: No
- Toe Adjustment: Yes
- Lifted Runout: Yes
- Live Caster: Yes
- Runout Compensation: Yes
- Wheel Alignment Modes: Variable 2-8 wheels
- Database Update: Yes
- Customer Manager: Yes
- Max. Width: Up to 13 feet
- Max. Wheel Base: Up to 50 feet
- Power: 120V, 15 Amp, 1 Phase, 60Hz
- Ship Weight: 1,285 lbs. (3 pcs.)

ATD4P8B 8,000 LBS. FOUR POST STORAGE LIFT

Features:

- Chain driven
- Low height

Specifications:

- Capacity: 8,000 lbs.
- Overall Length w/ Ramp: 207-5/16"
- Overall Width (outside base plates): 103-1/2"
- Overall Height: 86"
- Lifting Height 74-3/4"
- Width Between Posts: 94-1/2"
- Length of Runways: 165-1/2"
- Width of Runways: 18-5/8"
- Lifting Speed: 90S
- Max. Clearance Under Track: 70"
- Base Plate Size: 10" x 12"
- Lock Position: 10
- Ship Weight: 1,545 lbs.
- Power: 110V, 20A, 1PH



ATD4P8DXL 8,000 LBS. XL DELUXE FOUR POST STORAGE LIFT

Features:

- Extended length
- Internal locks
- Poly-casters
- Jack-tray
- Steel ramps
- (3) drip trays

Specifications:

- Capacity: 8,000 lbs.
- Overall Length w/ Ramp: 225-1/2"
- Overall Width (outside base plates): 109.4"
- Overall Height: 94"
- Lifting Height 82-1/4"
- Width Between Posts: 100-5/16"
- Length of Runways: 180-1/2"
- Width of Runways: 18-5/8"
- Lifting Speed: 100S
- Max. Clearance Under Track: 78"
- Base Plate Size: 10" x 12"
- Lock Position: 12
- Ship Weight: 1,800 lbs.
- Power: 110V, 20A, 1PH

ATD4P8D 8,000 LBS. DELUXE FOUR POST STORAGE LIFT

Features:

- Internal locks
- Poly-casters
- Jack-tray
- Steel ramp
- (3) drip trays

Specifications:

- Capacity: 8,000 lbs.
- Overall Length w/ Ramp: 207-5/16"
- Overall Width (outside base plates): 103-1/2"
- Overall Height: 86"
- Lifting Height 74-3/4"
- Width Between Posts: 94-1/2"
- Length of Runways: 165-1/2"
- Width of Runways: 18-5/8"
- Lifting Speed: 90S
- Max. Clearance Under Track: 70"
- Base Plate Size: 10" x 12"
- Lock Position: 10
- Ship Weight: 1,705 lbs.
- Power: 110V, 20A, 1PH



ATD1P6 6,000 LBS. SINGLE POST STORAGE LIFT

Features:

- Chain driven
- Low height

Specifications:

- Capacity: 6,000 lbs.
- Overall Length w/ Ramp: 188"
- Overall Width (outside base plates): 112-3/16" (included PU)
- Overall Height: 110-1/4"
- Lifting Height 81-3/16"
- Length of Runways: 152"
- Width of Runways: 18-7/8"
- Lifting Speed: 90S
- Max. Clearance Under Track: 77-3/16"
- Base Plate Size: 52" x 39-1/8"
- Lock Position: 19
- Ship Weight: 2,610 lbs.
- Power: 110V, 20A, 1PH



ATD4P9DXL 9,000 LBS. XL DELUXE FOUR POST STORAGE LIFT

Features:

- Extended length
- Internal locks
- Poly-casters
- Jack-tray
- Steel ramps
- (4) drip trays
- Foot step

Specifications:

- Capacity: 8,000 lbs.
- Overall Length w/ Ramp: 207-5/16"
- Overall Width (outside base plates): 103-1/2"
- Overall Height: 86"
- Lifting Height 74-3/4"
- Width Between Posts: 94-1/2"
- Length of Runways: 165-1/2"
- Width of Runways: 18-5/8"
- Lifting Speed: 90S
- Max. Clearance Under Track: 70"
- Base Plate Size: 10" x 12"
- Lock Position: 10
- Ship Weight: 1,705 lbs.
- Power: 110V, 20A, 1PH

ATD4P8C 6" POLY CASTER KIT (SET OF 4)

Features:

- Durable 6" poly caster wheels
- Heavy-duty caster brackets
- All hardware included
- Use with ATD4P8DXL, ATD4P8B and ATD4P8D



ATD4P8DT 37" WIDE DRIP TRAYS (SET OF 3)

ATD4P8DTXL 42" WIDE DRIP TRAYS (SET OF 3)

Features:


- Used for catching leaks from getting on the bottom car when the lift is used for storage
- Use with ATD4P8B and ATD4P8D
- Use with ATD4P8DXL (ATD4P8DTXL only)



ATD4P7JT JACK TRAY

Features:

- Can be used as a tool or parts tray, also supports bottle jacks and jack stands
- 42" x 12"
- Use with ATD4P8DXL

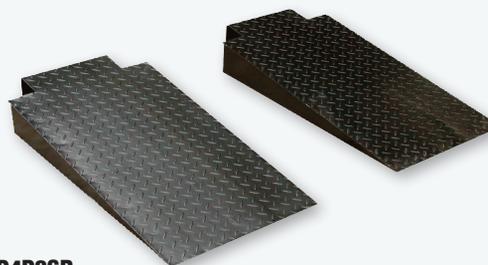

ATD4P8SR STEEL RAMPS (SET OF 2)

Features:

- Durable steel construction
- 36-3/4" long
- Use with ATD4P8DXL, ATD4P8B and ATD4P8D

ATD90BK DURO POWER UNIT 90° BRACKET KIT

Features:

- Durable powder coat finish
- Relocates power unit to side of column
- Designed to reduce overall lift width
- Mounts to front or rear of power unit column on ATD4P9DXL
- Mounts only to rear power unit column on ATD4P8 series lifts
- All hardware included



ATD4P7AR ALUMINUM RAMPS (SET OF 2)

Features:

- Lightweight aluminum construction
- 37" long
- Use with ATD4P8DXL, ATD4P8B and ATD4P8D



ATDSJ3500 SLIDING SCISSOR JACK

Features:

- 3,500 lbs. capacity
- Hand pump (no air required)
- Low profile design
- Compatible with many storage lift brands
- Use with ATD4P8DXL, ATD4P8B and ATD4P8D
- Sliding operation
- 3 locking positions
- Includes lift pads and height extensions



ATDRJ4500 ROLLING SCISSOR JACK


Features:

- 4,500 lbs. capacity
- Hand pump (no air required)
- Low profile design
- Jack rail required
- Smooth rolling operation
- 3 locking positions
- Includes lift pads and height extensions
- Use with ATD4P9DXL

ATD2KSCUTV
SINGLE COLUMN
UTV & MOWER
STORAGE/SERVICE
LIFT

Features:

- 2,000 lbs capacity
- Innovative 'multi-use' single column dual adjustable platform lift design
- Ideal storage solution for most small to mid-sized ATVs, UTVs, golf carts, riding lawn mowers & zero turns
- Ability to easily load vehicles from either the 'front or side' of platforms
- Adjustable platforms provide undercarriage clearance to easily service most riding lawn mower decks, blades & UTV / ATV engine service
- Easily adjust & secure platforms to desired widths using integrated 'retractable' nylon roller brackets & quick release' bolster pins
- Extended rise height for increased storage & service clearances
- Alternate power unit mounting to front, side or rear of column
- 'Quick removal' outer wheel stop bars
- 8 EA steel 'quick adjust / multi-position' platform side ramps

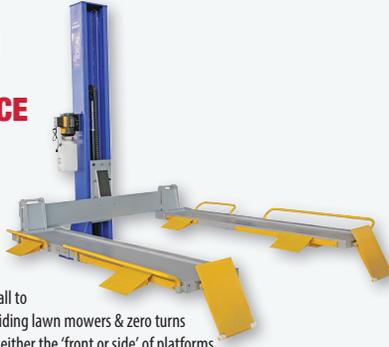

ATD2KMAO
1,000 LBS. M-CHOCK & BASE PLATE KIT

Features:

- 1,000 lbs capacity
- Easily load motorcycles from either the 'front or side' of platforms
- M-Check's 'self-stand' feature allows for one-person loading & unloading


ATDSC2SL
2,000 LBS SINGLE
POST PLATFORM
STORAGE LIFT

Features:

- Fits in most residential garages
- Minimal space, maximum storage
- Large storage platform allows parking under platform
- 58" of clearance under platform

Specifications:

- Capacity: 2,000 lbs.
- Width Overall: 64-5/8"
- Height Overall: 84-1/2"
- Depth Overall: 69-1/2"
- Lift Rise Height: 58"
- Platform Height: 2-3/4"
- Platform Frame Size: 64-1/2" x 47-3/8"
- Platform Aluminum Deck Size: 36" x 48"
- Platform Structure Size: 64-1/2" x 52-5/8"
- Shipping Weight (motor pump included): 605 lbs.
- Power: 115V AC, 1PH, 20 Amp

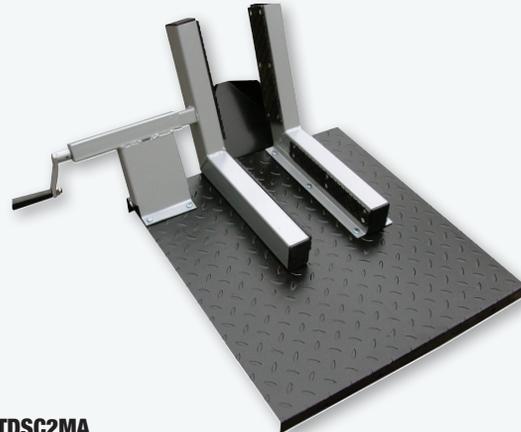

ATDSC2MA
MOTORCYCLE VISE ATTACHMENT
FOR ATDSC2SL

Features:

- Allows motorcycle service and storage

ATDMSC6
6,000 LBS. MOBILE SINGLE
COLUMN LIFT

Features:

- Electric/Hydraulic powered
- Chain drive operation
- Full under vehicle clearance
- Mobile operation w/ integrated hydraulic pallet pump jack
- Fully adjustable swing arms
- Single point lock release
- Heavy-duty construction

Specifications:

- Capacity: 6,000 lbs.
- Minimum Height: 2"
- Lifting Height 72"
- Overall Length w/ Ramp: 101-9/16"
- Main Side Arms - min/max: 19-11/16" - 26"
- Off Side Arms - min/max: 24-5/8" - 34"
- Ship Weight: 1,826 lbs.
- Power: 110V, 20A, 1PH



ATDMSC6AK
UTV ADAPTER KIT
FOR ATDMSC6

Features:

- 2,600 lbs. capacity (650 lbs. per adapter)
- Durable powder coat finish
- Adjustable width and 360° bracket rotation
- Extends spin-up pad lifting range by 8.9" per arm
- Adjustable width locking cradle base for lifting pads
- Ideal for utility, power sport and] recreational type vehicles
- Quick and easy installation and removal



ATDSL6L 6,000 LBS. LOW-RISE SCISSOR LIFT

Features:

- Low drive-over height
- Automatic safety lock
- Rubber riser blocks included

Specifications:

- Capacity: 6,000 lbs.
- Overall Length: 86"
- Overall Width: 73"
- Lifting Height: 26"
- Minimum Pad Height: 3"
- Lifting Height w/ Adapters: 30"
- Width Between Runways: 35"
- Width of Runways: 19"
- Lifting Speed: 35S
- Pad Length: 52"
- Ship Weight: 955 lbs.
- Power: 110V, 20A, 1PH



ATDPL6 6,600 LBS. LOW-RISE PIT LIFT

Features:

- Low profile surface mounting
- Automatic safety locks w/ pneumatic release
- Multiple locking positions
- Rubber riser blocks included

Specifications:

- Capacity: 6,600 lbs.
- Overall Length: 83-1/4"
- Overall Width: 66"
- Lifting Height: 28-1/2"
- Minimum Pad Height: 4-1/4"
- Lifting Height w/ Adapters: 30"
- Width Between Runways: 0 to 29-1/2"
- Width of Runways: 18"
- Lifting Speed: 40S
- Pad Length: 53"
- Ship Weight: 770 lbs.
- Power: 110V, 20A, 1PH



ATDSL6M 6,000 LBS. MID-RISE SCISSOR LIFT

Features:

- Low drive-over height
- Automatic safety lock
- Rubber riser blocks included

Specifications:

- Capacity: 6,000 lbs.
- Overall Length: 96-1/2"
- Overall Width: 39-5/8"-62"
- Lifting Height: 48-1/2"
- Minimum Pad Height: 7"
- Lifting Height w/ Adapters: 54"
- Lifting Speed: 40S
- Pad Length: 24" min. / 83" max.
- Ship Weight: 945 lbs.
- Power: 110V, 20A, 1PH



ATDSL6SAK 1-1/2" HEIGHT ADAPTERS (SET OF 4) FOR ATDSL6M



ATDSL6TAK 5" HEIGHT ADAPTERS (SET OF 4) FOR ATDSL6M



ATDSL6PM 6,000 LBS. MID-RISE SCISSOR LIFT

Features:

- Portable
- Multiple locking positions
- Automatic dual safety locks w/ pneumatic release
- Wheel kit
- Tow bar and rubber riser blocks included

Specifications:

- Capacity: 6,000 lbs.
- Overall Length: 77"
- Overall Width: 76-1/2"
- Lifting Height: 38"
- Minimum Pad Height: 4"
- Lifting Height w/ Adapters: 39-1/2"
- Lifting Speed: 40S
- Pad Length: 56"
- Ship Weight: 1,355 lbs.
- Power: 110V, 20A, 1PH



ATDSL6MAK 2" HEIGHT ADAPTERS (SET OF 4) FOR ATDSL6M



ATDPL6HA HEIGHT ADAPTERS (2 SETS / 4 EA.) FOR ATDPL6AK

Features:

- (4) 5" high adapters, (4) 2.5" low adapters



ATDSL10K 10,000 LBS. LOW-RISE COMMERCIAL PAD LIFT

Features:

- Dual hydraulic lift cylinders
- Ideal for express tire & wheel service
- Metal hose covers 55" L (2 ea.)
- Surface mount install configuration
- Power unit pedestal stand
- Integrated outer frame & ramps provide drive-on & off clearance for wide wheels
- Latch release handles on each side of lift



ATDPL6AK PIT LIFT RADIAL ARM KIT

Features:

- Allows frame lifting with pad contacts
- Adapter arms length - 16-1/2" to 23"
- Durable rubberized lift pads
- Use with ATDPL6 only



ATDSL6A SUV ADAPTER SET

Features:

- Use with ATDSL6PM and ATDSL6L






**ATDTLFT
AUTOMOTIVE TILT LIFT**

- Features:**
- Safely lifts and tilts uni-body vehicles with 48" to 61" frame rail widths
 - Allows for comfortable work height and undercarriage access
 - Adds inspection and service capabilities for repair shops
 - Industry-leading 7,000 lbs. capacity
 - Handheld drill operation - no hydraulics
 - Low-profile, lightweight, portable and storable
 - Exclusive dual independent safety lock bars and pins allow for full operation from either side of the lift
 - Twin dual-action precision gear drives
 - Adjustable width platforms
 - Durable powder-coat finish
 - Weather resistant for indoor or outdoor use
 - Includes jack stand, platform risers, drill-drive adapters, wall mount brackets, and manual handle with socket adapter




- Specifications:**
- Max Lift Height: 22-1/2" (23-1/2" w/Risers)
 - Lift Dimensions: 51-3/4" L x 64-3/8" W x 4-1/2" H
 - Lift Speed: 30-40 sec.
 - Platform Length and Width: 31-1/2" x 7-1/4"
 - Outside - Platforms Widths: 59-1/4" to 63-3/4"
 - Inside - Platforms Widths: 44-1/2" to 49-1/4"
 - Power (Corded Drill): 10 Amp, 120V AC, 1/2"
 - Ship Weight: 214 lbs.

STANDARD ACCESSORIES INCLUDED

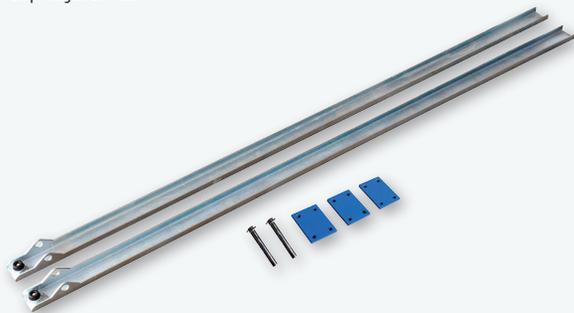

**ATDTLFTFR
TILT LIFT FLOOR RAIL KIT**

- Features:**
- Required for insufficient floor surfaces, such as uneven or rough floors
 - Reduces lift's wheel travel marks for polished or epoxied type floors

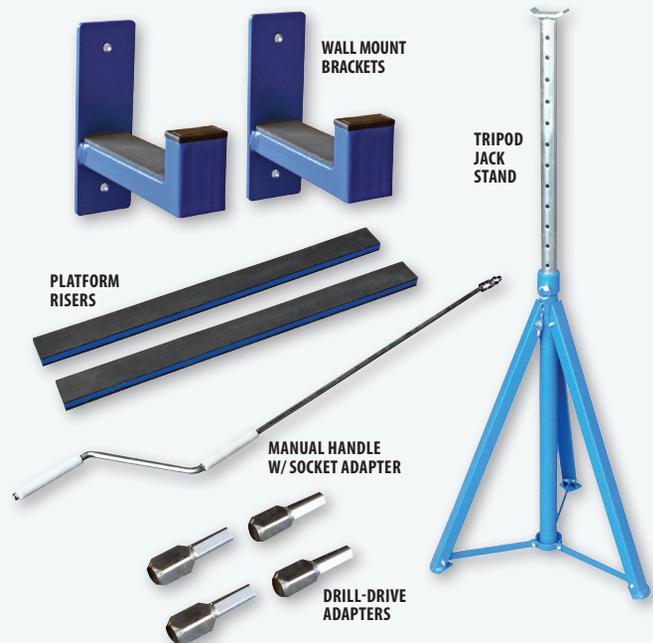

ATDMS132

13,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT

(2 Column Set - 26,000 lbs. total capacity)

ATDMS13

13,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT

(4 Column Set - 52,000 lbs. total capacity)

ATDMS136

13,000 LBS. HEAVY-DUTY SINGLE MOBILE COLUMN LIFT


(6 Column Set - 78,000 lbs. total capacity)

Features:

- Up to 78,000 lbs. capacity
- Easy to use control panel
- Battery operated with on-board charging system
- Convenient operation from any column
- Independent mechanical locking system
- Small footprint allows for out of the way storage using pallet jack style base
- Adjustable fork accommodates many wheel sizes
- Direct drive hydraulic cylinders
- Easily moved for operation in multiple bays
- Optional accessories for expanded service operations
- Batteries not included

Specifications:

- AC Power (Input per column): 100–140V AC, 60Hz, 1 PH
- DC Power (Output per column): 24V DC
- Lifting Height: 67.1"
- Min./Max. Column Height: 88.6"/155.5"
- Column Width: 44.1"
- Fork Adjustable Range: 6.3" - 22"
- Fork Length: 14"
- Fork to Column Clearance: 9.3"
- Rise/Descent Time: 75S/60S
- Max. Distance Between Columns: 32' - 8"
- Min. Concrete Surface Strength: 3000 psi
- Set Up/Operation: Indoors
- Battery Type Recommended: 12V DC Sealed Deep Cycle Battery (BCI Group 31, AH-105) - not included
- Ship Weight: 1,210 lbs. per column

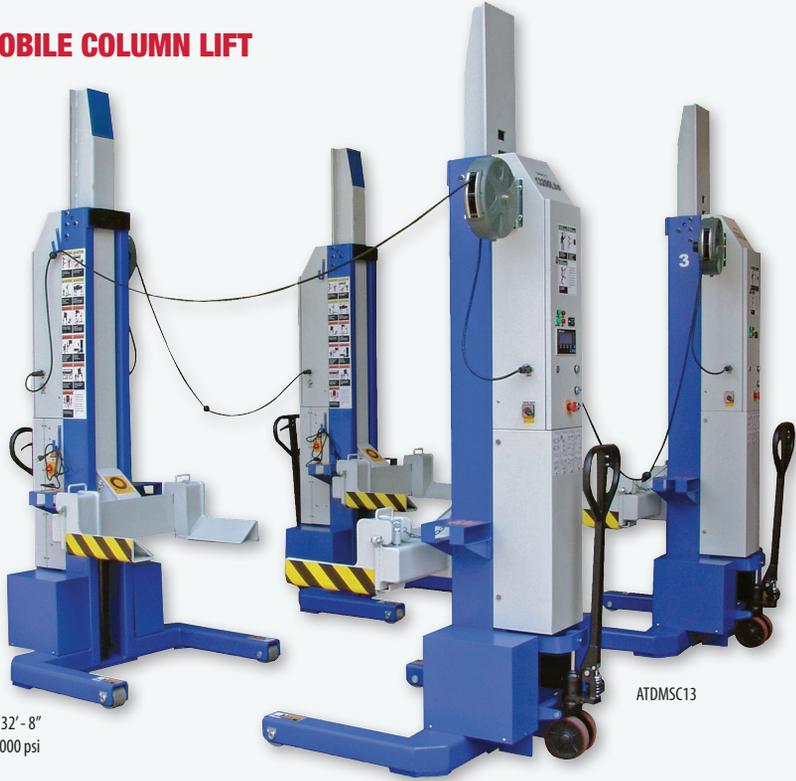

ATDMS13

MSC-44K-STAND-26

HEAVY-DUTY LOW-RISE STAND

MSC-44K-STAND-46

HEAVY-DUTY MID-RISE STAND

Features:

- 20 Ton max. support capacity (40,000 lbs.)
- Quality built professional screw style jack stand
- Adjustable heights 16"–26" (MSC-44K-STAND-26)
- Adjustable heights 26"–46" (MSC-44K-STAND-46)
- Swivel style precision lift support with locking collar
- Easy to turn handle for accurate height adjustment
- Wide base provides optimal jack stability support
- Batteries not included



44K-STAND-26

44K-STAND-46

MSC-FL-RAMPSET

FORKLIFT RAMP SET

Features:

- 20,000 lbs. max. support capacity (10,000 per ramp and platform)
- Allows forklift to be driven onto elevated lifting position
- Designed to work in conjunction with forklift spacers
- Works with both MSC18K-X and ATDMS13 Series lifts



MSC13KB-LTVAK

LIGHT TRUCK VEHICLE ADAPTER KIT

Features:

- 20,000 lbs. max support capacity (10,000 lbs. per adapter)
- Allows for wheels free service with frame-engaging lifting
- Frame-engaging 'End' lifting for front & rear of most vehicles
- Requires two MSC-13KB column operation
- Adjustable width pillar supports
- Standard HD swivel/rubber contact pads
- Used in pairs only with two column lift configuration
- Works only with MSC-13KB lift



ATDMS13RC

HANDHELD REMOTE CONTROLLER

Features:

- Works only with ATDMS13 Series columns
- Quick, secure "screw lock" plug connection



MSC-STAND18X

ALI CERTIFIED HEAVY-DUTY HIGH RISE STAND

Features:

- 18,000 lbs. max. support capacity
- Adjustable pillar height with spring assist
- Locking heights 48-5/8"–69-7/8"
- Easy stand positioning with spring loaded casters
- Foldable leg design provides additional storage space



MSC-18K-X-236
18,000 LBS. HEAVY-DUTY
SINGLE MOBILE COLUMN LIFT
(2 Column Set - 66,000 lbs. total capacity)

MSC-18K-X-472
18,000 LBS. HEAVY-DUTY
SINGLE MOBILE COLUMN LIFT
(4 Column Set - 72,000 lbs. total capacity)

MSC-18K-X-6108
18,000 LBS. HEAVY-DUTY
SINGLE MOBILE COLUMN LIFT
(6 Column Set - 108,000 lbs. total capacity)

Features:

- Up to 108,000 lbs. capacity
- 24V DC battery operation with on-board charging system
- Communication cable with retractable cable reels
- U-shaped wiring configuration for quick entry and exit
- Convenient operation from any column
- Independent mechanical locking system
- Optical encoder for continuous column synchronization
- Portability for out of the way storage using pallet jack style base
- Easy to position adjustable forks for different wheel sizes
- Direct drive hydraulic cylinders
- Emergency shut off switch on each column
- Master control panel for individual or paired synchronized operation
- Simple operation via LCD screen and keypad
- LED light with magnetic base (1 per two columns)
- Easily moved for operation in multiple bays
- Optional ALI Certified accessories for expanded service operations
- Batteries not included
- Easily moved for operation in multiple bays
- Optional accessories for expanded service operations
- Batteries not included

Specifications:

- AC Power (Input per column): 100–140V AC, 60Hz, 1 PH
- DC Power (Output per column): 24V DC
- Lifting Height: 67.1"
- Min./Max. Column Height: 88.6"/155.5"
- Column Width: 44.1"
- Fork Adjustable Range: 12.6"–22"
- Fork Length: 17.9"
- Fork to Column Clearance: 10"
- Rise/Descent Time: 100S/60S
- Max. Distance Between Columns: 32' - 8"
- Min. Concrete Surface Strength: 3000 psi
- Set Up/Operation: Indoors
- Battery Type Recommended: 12V DC Sealed Deep Cycle Battery (BCI Group 31, AH-105) - not included
- Ship Weight: 1,584 lbs. per column



MSC-18K-X-236
MSC-18K-X-472
MSC-18K-X-6108



LED LIGHT
WITH
MAGNETIC
BASE



MSC-FORKSPACER
ALI CERTIFIED FORKLIFT
SPACER KIT

Features:

- 20,000 lbs. max. support capacity (10,000 lbs. per adapter)
- Allows for wheels free service with frame engaging lifting
- Frame engaging "SIDE" lifting for most fork lifts
- Requires two MSC-18K-X column operation
- Spacers fit securely between MSC-18KX lifting arms
- Works with both MSC18K-X and ATDMSC13 Series lifts



MSC18KX-LTVAK
ALI CERTIFIED LIGHT
VEHICLE ADAPTER KIT

Features:

- 20,000 lbs. max support (10,000 lbs. per adapter)
- Requires two MSC-18K-X column operation
- Adjustable width pillar supports
- Standard heavy-duty swivel/rubber contact pads
- Used in PAIRS ONLY with two column lift configuration
- Allows for wheels free service with frame engaging lift
- Frame engaging "End" lifting for front and rear of most vehicles
- Works only with MSC-18K-X Series lifts



MSC18KX-CRSBM
ALI CERTIFIED CROSS BEAM

Features:

- 22,000–33,000 max. support capacity
- Allows for wheels free service with frame engaging lift
- Requires two MSC-18KX column operation
- Adjustable width and height pillar supports
- Heavy-duty standard, axle and cradle contact pad adapters (1 pair each)
- Poly casters and tow bar included
- Used individually or in pairs with two or four column lift configurations
- Can also be used with ATDMSC13 Series lifts

ATDWB WHEEL BALANCER WITH HOOD

Features:

- High performance
- Self-calibrating
- (3) Centering cones
- Static balancing
- Hood included
- Hammer speed nut and caliper come standard

Specifications:

- Data Entry: Keypad
- Max Wheel Diameter: 39"
- Rim Width: 1.5"-20"
- Rim Diameter: 10"-24"
- Wheel Weight Capacity: 150 lbs.
- Accuracy: 1 gram
- Power Supply: 110V, 15A, 1PH
- Footprint: 56"W x 64"D
- Ship Weight: 335 lbs.



ATDWBB WHEEL BALANCER

Features:

- High performance
- Self-calibrating
- (3) Centering cones
- Static balancing
- Hood not included
- Hammer speed nut and caliper come standard

Specifications:

- Data Entry: Keypad
- Max Wheel Diameter: 39"
- Rim Width: 1.5"-20"
- Rim Diameter: 10"-24"
- Wheel Weight Capacity: 150 lbs.
- Accuracy: 1 gram
- Power Supply: 110V, 15A, 1PH
- Ship Weight: 305 lbs.



ATDWBCB WHEEL BALANCER

Features:

- Large rim balancing
- High performance
- Ease of use
- Power saving mode
- Multi-mode balancing options
- Foot brake
- Laser light indicators
- (3) centering cones
- Hood, hammer speed nut and caliper come standard
- Multi-mode balancing for SUV, car and motorcycle
- Foot brake for accurate weight applications

Specifications:

- Data Entry: Keypad
- Max Wheel Diameter: 44"
- Rim Width: 1.5"-20"
- Rim Diameter: 1"-28"
- Accuracy: 1 gram
- Wheel Weight Capacity: 150 lbs.
- Power Supply: 110V, 15A, 1PH
- Ship Weight: 352 lbs.



ATDWBAB MOTORCYCLE "STANDARD" SHAFT ADAPTER KIT

Features:

- Wheel clamp for 14-1/2"-32" tire diameter
- Standard 14mm shaft
- Cones up to 1-1/8"
- Use with ATDWB and ATDWBB



ATDWBMA MOTORCYCLE "STANDARD" SHAFT ADAPTER KIT


Features:

- Wheel clamp for 14-1/2"-32" tire diameter
- Standard 14mm shaft
- Cones up to 1-1/8"
- Use with ATDWBCB

ATDPWL PNEUMATIC WHEEL LIFT

Features:

- For use with all wheel balancers
- 440 lbs. capacity
- Lifts to 17" height
- Air operated
- Use with ATDWB, ATDWBB, and ATDWBCB

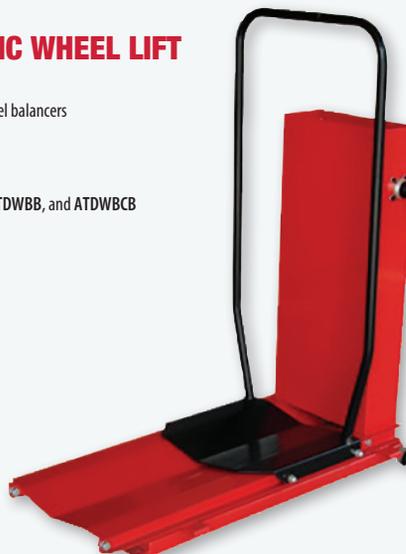

ATDWBTA36 36MM TRUCK ADAPTER SPACER KIT FOR ATDWB



ATDWBTA36



ATDWBTA40

ATDWBTA40 40MM TRUCK ADAPTER SPACER KIT FOR ATDWBCB

Features:

- The aluminum spacer allows correct mounting of deep dually wheels.
- Ton and single axle 1 Ton wheels. In addition the double sided cone goes to an industry standard 6-7/8

Specifications:

- Cone Range (Small Side): 4-7/8"–6-1/8"
- Cone Range (Large Side): 6"–6-7/8"
- Aluminum Spacer Offset: 1-3/4"
- Spacer ID/Spacer OD: 7-1/4" / 8-5/8"
- Spacer Center Hole ATDWBTA36: 36mm
- Spacer Center Hole ATDWBTA40: 40mm

ATDWBTC 36MM LIGHT TRUCK CONE SET FOR ATDWB & ATDWBB



ATDWBTC

ATDWBLTC 40MM LIGHT TRUCK CONE SET FOR ATDWBCB

Features:

- Spacer and cone up to 6-1/8"
- For use with 3/4 Ton and some 1 Ton trucks

ATDWWB BASIC WHEEL WEIGHT KIT

Features:

- For steel wheel application
- Zinc material/galvanized surface
- Includes one complete set of clip-on steel rim weights - (50 ea.) .25 oz. – .75 oz. and (25 ea.) 1 oz.–3 oz.; and one box of adhesive weights - .25 oz., 50 strips, 12 squares per strip



ATDWWDX DELUXE WHEEL WEIGHT KIT

Features:

- For steel and aluminum alloy wheel applications
- Zinc material/galvanized surface
- Includes one complete set of clip-on steel rim weights - (50 ea.) .25 oz. – .75 oz. and (25 ea.) 1 oz.–3 oz.; one complete set of clip-on aluminum rim weights - (50 ea.) .25 oz. – .75 oz. and (25 ea.) 1 oz.–3 oz.; and one box of adhesive weights - .25 oz., 50 strips, 12 squares per strip



ATDWBT HEAVY-DUTY WHEEL BALANCER

Features:

- High performance
- Heavy-duty
- Pneumatic
- Car and truck
- Wheel lifter included
- Self-calibrating
- Self-diagnosis
- Pneumatic wheel lift included
- Foot brake for manual stop
- Capable of balancing a full range of wheels
- Car and truck cones come standard



Specifications:

- Data Entry: Keypad
- Max Wheel Diameter: 47"
- Rim Width: 1.5"-20"
- Rim Diameter: 10"-24"
- Wheel Weight Capacity: 298 lbs.
- Accuracy: 1 gram
- Power Supply: 220V, 20A, 1PH
- Ship Weight: 650 lbs.

ATDWBAS MOTORCYCLE "LARGE" SHAFT ADAPTER KIT

Features:

- Heavy-duty 19mm shaft for heavy wheels
- Cones up to 1-15/16"
- Use with ATDWB and ATDWBB



ATDWBAP LUG CENTRIC UNIVERSAL ADAPTER

Features:

- Lug adapter designed for lug centric wheels
- Use with ATDWBCB or balancers with 40mm shaft



ATDWBH

ATDWBH HOOD ASSEMBLY FOR ATDWB & ATDWBB

ATDWBH1 HOOD ONLY FOR ATDWBT

ATDTCHD HEAVY-DUTY SEMI-AUTOMATIC TIRE CHANGER

Features:

- Swing arm design
- Handles tires to 47" diameter and rim widths to 15"
- Bead seating inflation jets in clamping jaws
- Twin clamping cylinders hold the most difficult rims
- Conveniently located, powerful bead breaker
- 26" x 26" square turntable handles wheel diameters up to 47" with ease

Specifications:

- Max Wheel Diameter: 47"
- Max Wheel Width: 3"-15"
- Inside - Rim Clamp Range: 15"-28"
- Outside - Rim Clamp Range: 13"-24"
- Working Pressure: 125 psi
- Power Supply: 110V, 15A, 1PH
- Ship Weight: 640 lbs.



ATDTCHDPA HEAVY-DUTY, SEMI-AUTOMATIC TIRE CHANGER WITH PRESS ARM

Features:

- Swing arm design
- Handles tires to 47" diameter and rim widths to 15"
- (4) pneumatic clamps and double acting cylinders
- Side mounted bead breaker
- Press arm for low profile tires
- Bead seating inflation jets in clamping jaws
- 26" x 26" square turntable handles wheel diameters up to 47" with ease
- No scratching - machine never contacts rim

Specifications:

- Max Wheel Diameter: 47" • Working Pressure: 125 psi
- Wheel Width: 3"-15" • Ship Weight: 880 lbs.
- Inside - Rim Clamp Range: 15"-28"
- Outside - Rim Clamp Range: 13"-24"
- Power Supply: 110V, 15A, 1PH



ATDTCAL LEVERLESS TIRE CHANGER

Features:

- Leverless design
- (3) function assist arm
- Tilt back column
- Pneumatic locking hex shaft
- Powerful dual bead blaster jets on all four clamps
- Inflation hose and air gauge

Specifications:

- Max Wheel Diameter: 41"
- Wheel Width: 3"-15"
- Inside - Rim Clamp Range: 13"-26"
- Outside - Rim Clamp Range: 11"-24"
- Working Pressure: 125 psi
- Power Supply: 110V, 15A, 1PH
- Ship Weight: 975 lbs.



ATDTCHDT HEAVY-DUTY TRUCK TIRE CHANGER

Features:

- Handles tires with tubeless rims or lock rings
- 2-speed, four-jaw rotating chuck
- Quick change mount/demount arm
- Control unit on movable stand
- Pressure regulated hydraulic pump
- Ideal for agricultural equipment, trucks, tractors and earth movers

Specifications:

- Max Wheel Diameter: 64"
- Wheel Width: 31.5"
- Inside - Rim Clamp Range: 14"-26"
- Outside - Rim Clamp Range: N/A
- Working Pressure: 125 psi
- Power Supply: 220V, 20A, 1PH
- Ship Weight: 1,690 lbs.



ATDTC SEMI-AUTOMATIC TIRE CHANGER

Features:

- Swing arm design
- Manual mount/demount operation
- (4) pneumatic clamps and double acting cylinders
- Side mount bead breaker
- Integrated bead inflation jets
- Pneumatic clamps
- Includes water separator
- Lubricator and regulator

Specifications:

- Max Wheel Diameter: 38"
- Max Wheel Width: 3"-12"
- Inside - Rim Clamp Range: 12"-23"
- Outside - Rim Clamp Range: 10"-20"
- Working Pressure: 125 psi
- Power Supply: 110V, 15A, 1PH
- Ship Weight: 560 lbs.



ATDTCCE ECONOMY TIRE CHANGER

Features:

- Swing arm design
- Manual operation of mount/demount tool
- Four pneumatic clamps and double acting cylinders
- Side mount bead breaker
- Includes water separator, lubricator and pressure regulator

Specifications:

- Max Wheel Diameter: 38"
- Wheel Width: 3"-11"
- Inside - Rim Clamp Range: 12"-21"
- Outside - Rim Clamp Range: 10"-18"
- Working Pressure: 125 psi
- Power Supply: 110V, 15A, 1PH
- Ship Weight: 460 lbs.



ATDTCM MOTORCYCLE TIRE CHANGER

Features:

- Designed specifically for motorcycle wheels
- Adjustable clamp seat
- Four pneumatic clamps and double acting cylinders
- Side mounted bead breaker
- Includes water separator, lubricator and air pressure regulator

Specifications:

- Max Wheel Diameter: 37"
- Max Wheel Width: 10"
- Inside - Rim Clamp Range: N/A
- Outside - Rim Clamp Range: 6"-24"
- Working Pressure: 125 psi
- Power Supply: 110V, 15A, 1PH
- Ship Weight: 470 lbs.



ATDTMCM MOTORCYCLE/ATV MANUAL TIRE CHANGER

Features:

- Manual motorcycle/ATV operation
- Integrated bead breaker
- Accommodates tubeless and tubed tires
- Suitable for go-kart and golf cart tires
- Integrated bead breaker
- Adjustable clamp

Specifications:

- Max Wheel Diameter: 4"-21"
- Inside - Rim Clamp Range: 3"-12.5"
- Outside - Rim Clamp Range: N/A
- Working Pressure: N/A
- Power Supply: Manual
- Ship Weight: 73 lbs.



ATDTCMA TIRE CHANGER MOTORCYCLE/ATV ADAPTER KIT

Features:

- Motorcycle/ATV clamp adapters
- Adapts tire changer clamps to change motorcycle and ATV wheels
- Change tires without removing brake discs or drive components
- For use with ATDTCE, ATDTC and ATDTCHD



ATDTSA PORTABLE TIRE SPREADER

Features:

- Manual/vertical operation
- Large 14" mounting base
- Tire width range 5-3/4"-10-3/4"
- Designed for use with most wheel clamp tire changers



ATDLSPA Left Side Mount Assist Arm shown on ATDTCHD

ATDLSPA LEFT SIDE MOUNT ASSIST ARM ASSEMBLY

Features:

- Left Side Mount Assist Arm
- Simplifies mounting of low profile and stiff sidewall tires
- Limits damage to expensive wheels
- Use with ATDTCHD



ATDAPAA Tower Mounted Assist Arm shown on ATDTCM

ATDAPAA TOWER MOUNTED ASSIST ARM ASSEMBLY

Features:

- Tower Mounted Assist Arm
- Simplifies mounting of low profile/stiff sidewall tires
- Limits damage to expensive wheels
- Use with ATDTCM and ATDTCE



ATDTS MANUAL VERTICAL TIRE SPREADER

Features:

- 360° swivel top
- (4) tilt settings
- Used for car and light truck tires

ATDM2200 ELECTRIC/ HYDRAULIC MOTORCYCLE LIFT BENCH

Features:

- Exclusive full width retractable ramp system
- 2,200 lbs. capacity
- 31-1/2" W x 88.6" L platform size
- 47" rise height
- Handheld remote control pendant
- 110V integrated electric/hydraulic power unit
- Magnetic lock releases with six locking positions
- Stabilizer bar for additional support
- Main platform designed for either Cycle Vise (ATDM1V) or Cycle Wheel Chock (ATDM22WC)
- Options: Cycle Vise (ATDM1V), Cycle Wheel Chock (ATDM22WC), Ramp Extension (ATD2200XR), Front Extension Panel (ATDM22FE), Dolly and Wheel Kit (ATDM22DK), Cycle Jack (ATDM1J)
- Tubular wheel stops
- Comes in black
- Quick release rear drop down service panel
- Tie down anchor eye bolts (4 each)



ATDM2200AK ATV SIDE EXTENSION KIT

Features:

- Converts ATDM2200 to ATV lift configuration
- Increases platform width to 50"
- It is included with the ATDA2200 lift
- Comes in black



ATDM2200UK UTV SIDE EXTENSION KIT

Features:

- Converts ATDM2200 to UTV lift configuration
- Increases platform width to 65"
- Included with the ATDA2200 lift
- Comes in black



ATDA2200 ELECTRIC/HYDRAULIC ATV LIFT BENCH


Features:

- Exclusive full width center ramp system
- Magnetic lock releases with six locking positions
- 110V integrated electric/hydraulic power unit
- 50" W x 88.6" L platform size
- Rear drop down service panel
- Tie down anchor eye bolts (4 each)
- Main platform designed for either Cycle Vise (ATDM1V) or Cycle Wheel Chock (ATDM22WC)
- Options: Cycle Vise (ATDM1V), Cycle Wheel Chock (ATDM22WC), Ramp Extension (ATD2200XR), Front Extension Panel (ATDM22FE), Dolly and Wheel Kit (ATDM22DK), Cycle Jack (ATDM1J)
- 2,200 lbs. capacity
- 47" rise height
- Handheld remote control pendant
- Stabilizer bar for additional support
- Wheel stops
- Comes in black

ATDM22FE FRONT EXTENSION PANEL FOR ATD2200 SERIES LIFTS

Features:

- Extends ATD2200 Series lift platforms by 21.6" (or to 110.25")
- Comes in black



ATDM2200TK TRIKE SIDE AND FRONT EXTENSION KIT FOR ATDM2200

Features:

- Converts ATDM2200 to trike lift configuration
- Increases table width to 62.2"
- Increases platform length to 110.25"
- Comes in black



ATDU2200 ELECTRIC/HYDRAULIC UTV LIFT BENCH


Features:

- Exclusive full width retractable ramp system
- Exclusive side extensions with center drop panels
- Smooth, rapid 110V integrated electric/hydraulic operation
- Magnetic lock releases with six locking positions
- 65" W x 88.6" L platform size
- Handheld remote control pendant
- Tie down anchor eye bolts (4 each)
- Main platform designed for either Cycle Vise (ATDM1V) or Cycle Wheel Chock (ATDM22WC)
- Options: Cycle Vise (ATDM1V), Cycle Wheel Chock (ATDM22WC), Ramp Extension (ATD2200XR), Front Extension Panel (ATDM22FE), Dolly and Wheel Kit (ATDM22DK), Cycle Jack (ATDM1J)
- 2,200 lbs. capacity
- 47" rise height
- Wheel stops
- Comes in black
- Stabilizer bar for additional support
- Rear drop down service panel

ATD2200XR RAMP EXTENSION

Features:

- Reduces ramp angle for low profile motorcycles
- 35" L x 16" W ramp size
- Designed to work with ATD2200 Series lifts
- Comes in black

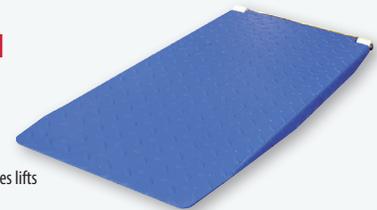

ATDM22DK DOLLY AND WHEEL KIT

Features:


- Includes nose dolly and wheel kit
- Makes ATD2200 Series lifts portable
- Comes in black



**ATDM1J
CYCLE JACK**

Features:

- 1,100 lbs. capacity
- Includes (2 each) adjustable frame cradles
- Platform Size 17-23/32" x 5-29/32"
- Min. Height: 3-3/4"
- Max. Height: 15-3/4"

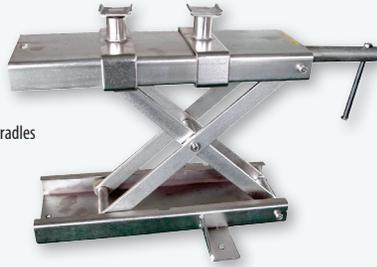

**ATDM1V
CYCLE VISE**

Features:

- Mounts to ATD2200 Series platform or front extension
- Securely holds cycle in upright/fix position
- Clamp design to fit most cycle front wheels
- Rubber pads for cycle wheel protection
- All hardware included



**ATDM1SE
SIDE EXTENSION
KIT FOR ATDM1**

Features:

- Increases platform width to 48"
- Durable powder coat finish
- All hardware included
- Comes in black



**ATDM22WC
SELF-LOCKING CYCLE CHOCK**

Features:

- Mounts to ATD2200 Series platform or front extension
- Adjustable self-locking operation
- Includes narrow tire adapters
- Securely holds cycle in upright/fix position
- Convenient one person operation
- All hardware included



**ATDM1FE
FRONT EXTENSION
PANEL FOR ATDM1**

Features:

- Increases platform length to 97"
- Durable powder coat finish
- All hardware included
- Pre-drilled mounting holes for ATDM1V Cycle Vise
- Comes in black



**ATDDMS1
DELUXE CYCLE STAND**

Features:


- 1,000 lbs. capacity
- Adjustable height with 5 height options
- Hand operated stand
- Durable powder coat finish
- Raises front or rear wheel for service or detailing
- Heavy-duty construction with 14 Ga. x 1-1/2" round tubing
- 3/16" thick protective vinyl tubing prevents scratching
- Locate handle assembly to either right or left side



**ATDUFL2500
ELECTRIC/
HYDRAULIC
UTV FRAME
LIFT**

Features:

- Exclusive "wheels free" design for the largest UTVs to the smallest ATVs
- 2,500 lbs. capacity
- 43" rise height (49" with rubber lift pads)
- 24" W x 88.9" L platform size
- 4-3/4" minimum height
- Smooth, rapid 110V electric/hydraulic operation
- Three locking positions
- Load bearing hinged ramps
- Portable or mounted pedestal controls
- Rubber contact lift pads - 4-3/4" x 6-1/2" (4 each)
- Optional UTV/ATV Wheel Stand Kit (ATDWHSTDKIT)
- Comes in black

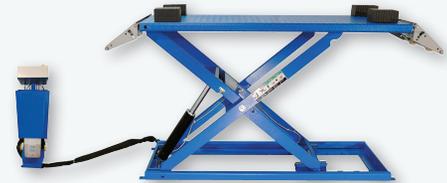

**ATDWHLSTDKIT
UTV/ATV WHEEL STAND KIT (SET OF 4)**

Features:

- Adjustable height 24.4"-42"
- Five locking height positions
- Includes four wheel stands
- All hardware included
- For use with ATDUFL2500
- Provides additional undercarriage service ability
- Supports largest UTV and ATV power sport vehicles
- Exclusive spring casters for easy lifting and mobility
- 625 lbs. capacity per stand (2,500 lbs. total capacity)
- Comes in black

**ATDM15HR
1,500 LBS. HIGH-RISE
MOTORCYCLE LIFT**

Features:

- Air/Hydraulic powered lift
- Side extensions and vise included
- Built-in drop-out panel
- 38" working height
- Large platform
- Accessories available



Specifications:

- Capacity: 1,500 lbs.
- Minimum Height: 6-3/4"
- Lifting Height: 38-1/2"
- Overall Length with Ramp: 109-1/2"
- Ship Weight: 765 lbs.
- Power: Air / Hydraulic
- Platform Size (L x W): 88-1/2" x 31-1/2"
- Platform w/ Side Extensions: 88-1/2" x 50"

**ATDM1
1,000 LBS. MOTORCYCLE LIFT**

Features:

- Air powered lift
- Built-in drop-out panel
- 30" working height
- Large platform
- Vise sold separately
- Accessories available



Specifications:

- Capacity: 1,000 lbs.
- Minimum Height: 7"
- Lifting Height: 30"
- Overall Length with Ramp: 108"
- Platform Size (L x W): 84" x 24"
- Platform w/ Side Extensions: 84" x 48"
- Ship Weight: 395 lbs.
- Power: Air (91-100 psi)



**ATDWBM
MOTORCYCLE WHEEL BALANCER**

- Features:**
- Works for motorcycle wheels up to 24" Dia. and tires up to 32" Dia.
 - Balances most motorcycle, light truck and automotive wheels
 - Proven low speed technology allows both static and dynamic balancing
 - Comes with cones, sleeves and spacers to balance wheels with a large 1-3/8" axle
 - Integrated weight tray for common weight storage at the machine
 - Optional 19mm Shaft Kit for wheels larger than 180mm

- Specifications:**
- Max. Tire Diameter - Motorcycle: 32" • Rim Width: 1.5"-20"
 - Maximum Tire Diameter - Auto: 39" • Wheel Weight Capacity: 150 lbs.
 - Wheel Diameter: 10"-24" • Data Entry: Manual

**ATDTCMATV
POWER SPORT TIRE CHANGER**

- Features:**
- Motorcycle, ATV and UTV tire changer
 - 6"-24" outside rim clamp range
 - Up to 37" tire diameter
 - Up to 10" wide wheel
 - Swing arm design
 - Four adjustable clamps for full clamping range
 - Powerful clamping with double acting pneumatic cylinders
 - Plastic clamps protect wheels from scratching
 - Powerful pneumatic bead breaker
 - Electric table rotation
 - Easy to use handheld inflation gun
 - Regulator, oiler and water trap included
 - Comes in black

- Specifications:**
- Max. Tire Diameter: 37"
 - Max. Wheel Width: 10"
 - Rim Clamp Range (Outside): 6"-24"
 - Bead Breaker Force: 5,500 lbs.
 - Working Pressure: 125 psi
 - Ship Weight: 470 lbs.
 - Power: 110V, 15A, 1PH



**ATDTCAA
POWER SPORT
TIRE CHANGER
& ASSIST ARM**

- Features:**
- Motorcycle, ATV and UTV tire changer
 - ATDTCMATV with assist arm
 - Tower mounted assist arm
 - Simplifies mounting of low profile and stiff sidewall tires
 - Limits damage to expensive wheels
 - Adjustable height push down foot
 - Simple up/down toggle operation
 - Air operated via tire changer air supply
 - Quick and easy installation
 - Makes mounting tires a one-man job
 - Comes in black

- Specifications:**
- Max. Tire Diameter (Motorcycle): 37"
 - Max. Wheel Width: 10"
 - Rim Clamp Range (Outside): 6"-24"
 - Bead Breaker Force: 5,500 lbs.
 - Working Pressure: 125 psi
 - Ship Weight: 530 lbs.
 - Power: 110V, 15A, 1PH



**ATDCR3
CAR ROTATOR**

- Features:**
- Durable powder coat finish
 - Heavy-duty balancing system
 - 360° rotation with 12 locking positions
 - 3,000 lbs. capacity car rotisserie
 - Heavy-duty tubular steel construction
 - 16" mounting arms used for direct mounting to floor or optional accessory mounting
 - (6) phenolic resin "lockable" casters
 - Adjustable height 17-3/4"-45-1/4" from mounting arms to floor
 - Telescoping bar allows adjustment up to 21' 6"
 - Dual 6,000 lbs. capacity jacks adjust working height

- Specifications:**
- Capacity: 3,000 lbs. • Overall Length: 258-1/4"
 - Overall Width: 58-7/8" • Lifting Height: 17-3/4" - 45-1/4"
 - Overall Height: 77-1/8" • Ship Weight: 410 lbs.



**ATDCR3UB
UNI-BODY BRACKETS**

Features:

- Universal design
- Sold in pairs of 2 each
- Heavy-duty construction
- Use with ATDCR3



**ATDCR3MFB
MOPAR FRONT BRACKETS**

Features:

- Mounts to bumper bracket location
- Sold in pairs of 2 each
- Heavy-duty construction
- Use with ATDCR3



**ATDCR3MSB
MOPAR E-BODY LEAF SPRING BRACKETS**

Features:

- Mounts to rear leaf spring perch or rear bumper mount
- Sold in pairs of 2 each
- Heavy-duty construction
- Use with ATDCR3



**ATDCR3VB
VALENCE BRACKETS**

Features:

- Universal design
- Sold in pairs of 2 each
- Heavy-duty construction
- Use with ATDCR3



**ATDCR3DB
UNIVERSAL DOOR BARS**

Features:

- Universal design
- Heavy-duty construction
- Sold in pairs of 2 each
- Use with ATDCR3



**ATDCR3ATWK
ALL TERRAIN WHEEL KIT**

Features:

- Easily transport ATDCR3 over rough surfaces
- 2,000 lbs. capacity
- Quick, simple mounting
- Durable "Flat-Free" rubber wheels
- (2) swivel and (2) rigid casters
- Heavy-duty construction
- Powder coat finish



**ATDCR3SB
LEAF SPRING BRACKETS**

Features:

- Universal design
- Sold in pairs of 2 each
- Heavy-duty construction
- Use with ATDCR3


ATDBC3 STANDARD BODY CART

Features:

- 3,000 lbs. capacity
- Heavy-duty tubular steel construction
- Universal design
- Adjustable length and width
- 8" x 2" heavy-duty poly casters (2 locking)
- Durable powder coat finish
- Includes (4 each) fixed height straddle pads

Specifications:

- Capacity: 3,000 lbs.
- Adjustable Length: 38" - 65"
- Adjustable Width: 38" - 65"
- Ship Weight: 188 lbs.
- Adjustable Height: 22"

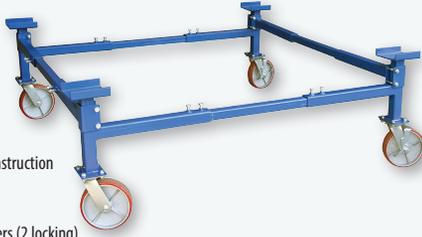

ATDBC3A ADJUSTABLE BODY CART

Features:

- 3,000 lbs. capacity
- Heavy-duty tubular steel construction
- Universal design
- Adjustable length, width and adapter height
- 8" x 2" heavy-duty poly casters (2 locking)
- Durable powder coat finish
- Includes: (4) straddle pads, (2) bolt down adapters and (2) leaf spring adapters

Specifications:

- Capacity: 3,000 lbs.
- Adjustable Length: up to 132"
- Adjustable Width: up to 60"
- Ship Weight: 289 lbs.
- Adjustable Height: 28" - 38"



ATDFR7718S STEEL PLATE DECK - 18' LONG FRAME RACK MACHINE

ATDFR7720S STEEL PLATE DECK - 20' LONG FRAME RACK MACHINE

Features:

- 7,700 lbs. capacity with Tubular Deck - 18 ft. deck length (ATDFR7718T)
- 7,700 lbs. capacity with Tubular Deck - 20 ft. deck length (ATDFR7720T)
- 7,700 lbs. capacity with Steel Plate Deck - 18 ft. deck length (ATDFR7718S)
- 7,700 lbs. capacity with Steel Plate Deck - 20 ft. deck length (ATDFR7720S)
- Durable, heavy-duty tubular or steel plate deck construction
- Adjustable tower collars
- Designed to accommodate both full frame and uni-body vehicles
- Durable powder coat finish
- Universal anchoring system with adjustable height pinch weld clamps
- (1 each) overhead boom/pull tower extension
- (1 pair) universal wheel stands and dead vehicle dollies included
- Multiple tie down hole locations
- (2 each) high quality air/hydraulic pumps with pressure gauges
- (2 each) pulling chains with hooks
- (2 each) high quality air/hydraulic pumps with pressure gauges
- (2 each) 10 Ton round pull towers with telescoping tower heads
- Quick disconnect hydraulic fitting and hose connections
- Hydraulic tilt deck operation with drive-on ramps
- Clear floor, 360° pulling capability

ATDFR7718S Specifications:

- Deck Design: Steel Plate
- Deck Length: 18'
- Deck Width: 82.6"
- Deck Height: 19.7"
- Pull Force Per Tower: 10 Ton
- Hydraulic Pressure: 10,000 psi
- Required Air Pressure: 100-120 psi
- Lifting Capacity: 7,700 lbs.
- Ship Weight: 5,071 lbs.
- Power: n/a

ATDFR7720S Specifications:

- Deck Design: Steel Plate
- Deck Length: 20'
- Deck Width: 82.6"
- Deck Height: 19.7"
- Pull Force Per Tower: 10 Ton
- Hydraulic Pressure: 10,000 psi
- Required Air Pressure: 100-120 psi
- Lifting Capacity: 7,700 lbs.
- Ship Weight: 5,953 lbs.
- Power: n/a




ATDFR55S SCISSOR FRAME RACK MACHINE

Features:

- 5,500 lbs. lift capacity
- Unique, compact versatile design
- Scissor style lift operation with twin hydraulic cylinders
- Handles both full frame and uni-body vehicles
- Easy vehicle positioning with swing arms and adjustable lift pads
- Universal anchoring system with adjustable height pinch weld clamps
- 10 Ton adjustable height "slotted" pull tower with down pull roller
- 10 ft. pulling chain with hook
- Multi-angle 360° pulling
- Quick disconnect hydraulic fittings and hose connections
- High quality air/hydraulic pump with pressure gauge
- Portable console cabinet for lift operation with pneumatic lock release
- Remote handheld pendant for lift operation
- Four universal wheel stands included
- Durable powder coat finish

Specifications:

- Deck Design: Scissor Lift
- Deck Length: 14' 5-1/4"
- Deck Width: 37"
- Deck Height: 4.75" - 63"
- Pull Force Per Tower: 10 Ton
- Hydraulic Pressure: 10,000 psi
- Required Air Pressure: 100-120 psi
- Lifting Capacity: 5,500 lbs.
- Ship Weight: 3,105 lbs.
- Power: 220V AC, 20A, 1PH

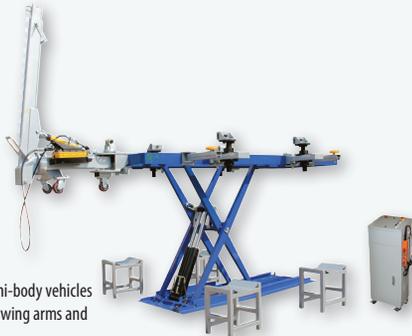

ATDFR77TCK



ATDFR55TCK

ATDFR77TCK 25-PC. FRAME RACK TOOL BOARD & CLAMP KIT

ATDFR55TCK 20-PC. FRAME RACK TOOL BOARD & CLAMP KIT

Features:

- Frame Rack Tool Kits include all of the necessary clamps, fixtures and chain to grip, pull and hold during a typical straightening procedure. Designed to work with a wide range of full frame or uni-body type vehicles. The portable tool board is constructed with heavy gauge metal and standard with storage shelf, hooks, casters and durable powder coat finish. Adapters, clamps, cables and chains are heavy-duty, high quality construction with durable powder coat or zinc plated finish.



**ATDFREW
ELECTRIC WINCH**

Features:

- 3,500 lbs. capacity
- 30 ft. pull cable length
- 10 ft. DC power cord length
- 12V DC power operation
- Hook Size: 3/4" opening x 4" L
- Hand crank
- Heavy-duty marine grade durable construction
- Handheld remote control switch with 10 ft. cord
- Base "anchor" bracket for frame rack deck mounting
- Four universal wheel stands included
- Durable powder coat finish



**ATDFRABJ
AIR BAG JACK**

Features:

- 4,400 lbs. capacity
- Lifts most passenger vehicles and light trucks
- Low profile design
- Simple controls
- Pneumatic operation (100 psi)
- Internal telescoping stabilization sleeve
- Pressure relief valve to eliminate over inflation



**ATDPSMTD
PAINT MIXING TABLE & DISPENSER**

Features:

- Heavy-duty stainless steel construction
- Dual spray gun holder with catch basin
- (2) tape and paper masking dispensers
- Portable design with 3" poly casters
- Convenient 32" table height
- Large 37" x 22" table top area
- Minor assembly required

Specifications:

- Overall Size: 21.75" L x 46.5" W x 32" H
- Catch Basin Size: 19.25" L x 18.5" W x 1.25" H
- Work Top Area: 21.75" L x 37.37" W
- Max. Dispenser Sizes: 20" W and 34" W



**ATDPSMCT
PAINT MIXING CABINET & TABLE**

Features:

- Heavy-duty stainless-steel construction
- Large lockable storage cabinet
- (2) side drawers and storage bins
- Convenient 34" table height
- Large 46" x 20" table top area
- 1.25" retaining fence on three sides
- Ships fully assembled

Specifications:


- Overall Size: 20.5" L x 47.25" W x 35" H
- Storage Cabinet Size: 19" L x 31" W x 27.5" H
- Work Top Area: 19.75" L x 45.75" W
- Storage Drawer Size: (2) 14" L x 14.5" W x 5.75" H

PAINT SPRAY BOOTHS

ATDPB23CF3P (3 PHASE) ATDPB23CF1P (1 PHASE) 3 PHASE CROSS FLOW DRAFT PAINT SPRAY BOOTH

Features:

- Tilt panel design for optimal lighting coverage
- High quality UL listed lighting fixtures (light bulbs included)
- Personnel door with viewing window
- High quality intake and exhaust filters
- Powder coated finish (inside and outside)
- 5/16" bolt and nut installation
- Precision punched panels on 6 ft. centers
- All connection and mounting hardware
- Control panel
- Fan motor and door limit switches



Specifications:

- Inside Dimensions: 22'-6" L x 13' W x 8'-6" H
- Outside Dimensions: 25'-4" L x 13'-4" W x 8'-10" H
- Fan/Motor: 24" Tube-Axial Fan; 3 Hp, 3PH, 230/460V AC, 60 Hz; Non-Spark, NEMA Rated
- CFM: 9,500 @ .5 Static Pressure
- Lighting: (6) T-8 Light Fixtures, (4) Bulbs



ATDCFLED CROSS FLOW LED LIGHTING UPGRADE KIT

Features:

- Long lasting, energy efficient LED industrial lighting
- Reduces paint booth operational costs
- Increases booth brightness
- Two row LEDs providing 5,000K CCT
- UL/ETL listed 120-277V AC (50/60Hz) electrical
- Direct replacement for standard fluorescent light fixtures



PSB-AFCF23-LED-UPGRDKIT CROSS FLOW LED LIGHTING UPGRADE KIT

Features:


- LDPI LED lighting upgrade kit for PSB-AFCF model
- Long lasting, energy efficient LED industrial lighting
- Reduces paint booth operational costs
- Increases booth brightness
- Two row LEDs providing 5,000K CCT
- UL/ETL listed 120-277VAC (50-60Hz) electrical
- Direct replacement for standard fluorescent light fixtures



ATDPB25DK 25" x 8' CROSS FLOW & SIDE DOWN DRAFT EXHAUST DUCT KIT

Features:

- Provides duct work to properly exhaust Cross Flow and Side Down Draft Paint Spray Booths
- High quality 20 Ga. galvanized hammer seamed "plain pipe" ducting kit with 8 ft. standard height
- (1) Fan Connection Ring
- (1) 36" H x 25" Dia. Solid Duct with 32" H x 17" W clean out door
- (1) 36" H x 25" Dia. Solid "Center" Duct
- (1) 24" H x 25" Dia. Auto Roof Ventilator (ARV) protects from rain and snow
- Self-tapping screw assembly
- Extend duct kit height with additional "center" duct section
- (2) 25" duct kits required for Side Down Draft models

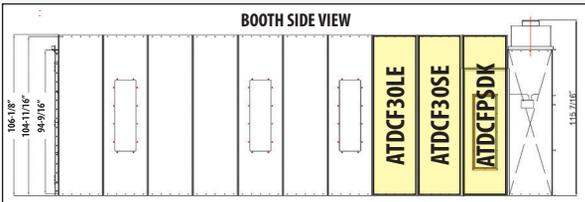

ATDCFPSDK - SIDE PERSONNEL DOOR KIT ATDCF30LE - 30" LIGHTED EXTENSION PANEL KIT ATDCF30SE - 30" SOLID EXTENSION PANEL KIT CROSS FLOW KITS

Features:

- White powder coated finish (inside and out)
- Assembly hardware included
- 5/16" bolt and nut assembly

ATDCFPSDK Includes:

- Personnel Side Door Size: 30" W x 84" H
- High quality hinges, pressure latch and handles
- Extend duct kit height with additional "center" duct section
- (2) 25" duct kits required for Side Down Draft models
- Viewing window included
- Heavy-duty dual skin construction
- Door activated shutoff switch

ATDCF30LE Includes:

- 30" lighted, rear booth extension
- HD precision punched 18 Ga. panel construction
- (8 ea.) GE T8 fluorescent lamps - 32W, 5000K, 4 ft. length
- (2 ea.) LDPI Industrial Lighting T8 "Vertical" light fixtures, 4 lamp


ATDCF30SE Includes:

- 30" solid, rear booth extension
- Precision punched 18 Ga. panel construction

**ATDPB26SDD3P (3 PHASE)
ATDPB26SDD1P (1 PHASE)
3 PHASE SEMI DOWN DRAFT PAINT
SPRAY BOOTH**

Features:

- Commercial grade hip panel design with control panel
- High quality intake and exhaust filters
- Tri-fold and personnel doors with viewing windows
- Powder coated finish (inside and outside)
- (10) High quality UL listed lighting fixtures (light bulbs included)
- 5/16" nut and bolt installation
- Precision punched 18 Ga. panel construction
- Dayton tube-axial fan - 3 Hp, 3PH
- Precision punched 18 Ga. panel construction
- Canopy plenum kit (optional)
- 9 ft. exhaust duct kit (optional)



Specifications:

- Inside Dimensions: 26' L x 14' W x 9'-3" H
- Outside Dimensions: 26'-4" L x 14'-4" W x 9'-7" H
- Fan/Motor: 30" Tube-Axial Fan; 3 Hp, 3PH, 230/460V AC, 60 Hz; Non-Spark, NEMA Rated
- CFM: 12,200 @ .5 Static Pressure
- Lighting: (10) T-8 Light Fixtures, (4) Bulbs



**ATDPBC26SDD
SEMI-DOWN DRAFT
PLENUM KIT**

(shown on booth above)


Features:

- Required when using direct "gas fired" air make up (heater) with paint booth
- Can be installed to new or existing semi-down draft paint booths
- Heavy-duty precision punched 18 Ga. panel construction
- Bright white powder coat panel finish inside and out
- Convenient 5/16" bolt and nut assembly
- Assembly hardware and sealant included

**ATDSDLED
SIDE- & SEMI-DOWN
LED LIGHTING
UPGRADE KIT**

Features:

- Long lasting, energy efficient LED industrial lighting
- Two row LEDs providing 5,000K CCT
- Reduces paint booth operational costs
- Increases booth brightness
- UL/ETL listed 120-277V AC (50/60Hz) electrical
- Direct replacement for standard fluorescent light fixtures

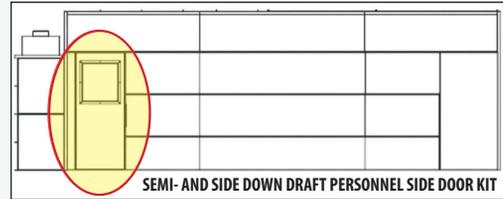

**ATDSDSDK
SEMI- & SIDE-DOWN DRAFT PERSONNEL
SIDE DOOR KIT**


Features:

- For ATDPB26SDD3P, ATDPB26SDD1P, ATDPB26DD3P and ATDPB26DD1P booths
- Door activated shut off switch
- Viewing window included
- Bright white powder coat door finish inside and outside
- High quality hinges, pressure latch and handles
- 5/16" bolt and nut installation
- Heavy-duty dual skin construction
- Personnel Side Door Size: 36" W x 84" H
- Assembly hardware included

**ATDPB31DK
31" x 8' SEMI-DOWN DRAFT
EXHAUST DUCT KIT**

Features:

- Provides duct work to properly exhaust Cross Flow and Side Down Draft Paint Spray Booths
- High quality 20 Ga. galvanized hammer seamed "plain pipe" ducting kit with 8 ft. standard height
- One duct end corrugated for easy assembly
- (1) Fan Connection Ring
- (1) 36" H x 31" Dia. Solid Duct with 32" H x 17" W clean out door
- (1) 36" H x 31" Dia. Solid "Center" Duct
- (1) 24" H x 31" Dia. Auto Roof Ventilator (ARV) protects from rain and snow
- Self-tapping screw assembly
- Extend duct kit height with additional "center" duct section from rain and snow
- Self-tapping screw assembly
- Extend duct kit height with additional "center" duct section
- (2) 25" duct kits required for Side Down Draft models

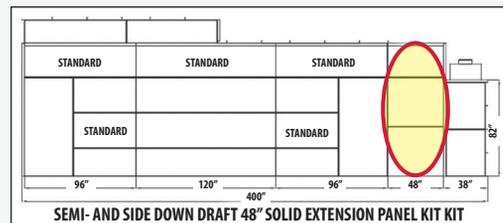

**ATDSD48EP
SEMI- & SIDE-DOWN 48" SOLID EXTENSION
PANEL KIT**

Features:


- 48" solid rear booth extension
- White powder coat panel finish (inside and outside)
- 5/16" nut and bolt installation
- Precision punched 18 Ga. panel construction
- Assembly hardware included

PAINT SPRAY BOOTHS

ATDPB26DD3P (3 PHASE) ATDPB26DD1P (1 PHASE) 3 PHASE SIDE DOWN DRAFT PAINT SPRAY BOOTH


Features:

- Commercial grade hip panel design with control panel
- High quality intake and exhaust filters
- Tri-fold and personnel doors with viewing windows
- Powder coated finish (inside and outside)
- (10) High quality UL listed lighting fixtures (light bulbs included)
- 5/16" nut and bolt installation
- (2) 8 ft. exhaust chimney stack assemblies
- Precision punched 18 Ga. panel construction
- (2) Dayton tube-axial fan - 2 Hp, 3PH
- Canopy plenum kit (optional)
- 9 ft. exhaust duct kit (optional)



Specifications:

- Inside Dimensions: 26' L x 14' W x 9'-3" H
- Outside Dimensions: 26'-4" L x 17'-8" W x 9'-5" H
- Fan/Motor: (2) 24" Tube-Axial Fan; 2 Hp, 3PH, 230/460V AC, 60 Hz; Non-Spark, NEMA Rated
- CFM: 14,000 @ .5 Static Pressure
- Lighting: (10) T-8 Light Fixtures, (4) Bulbs

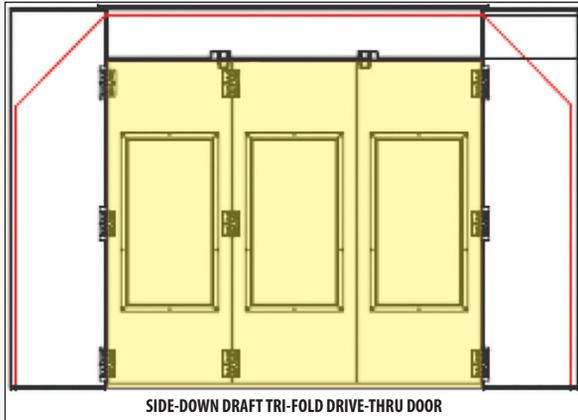

ATDSDDTDK SIDE DOWN DRAFT TRI-FOLD, DRIVE-THRU DOOR KIT

Features:

- Allows drive-thru configuration for ATDPSB26DD models
- Bright white powder coat door finish inside and outside
- Standard with integrated personnel door
- Viewing windows included
- Heavy-duty dual skin construction
- High quality hinges, pressure latch and handles
- Door activated shutoff switch
- Convenient 5/16" bolt and nut assembly
- Assembly hardware included

MORE OPTIONS AVAILABLE FOR SIDE DOWN DRAFT PAINT SPRAY BOOTHS:

- 48" EXTENSION PANEL KIT (ATDSDD48EP)
- SIDE PERSONNEL DOOR KIT (ATDSDDSDK)
- 8 FT. EXHAUST DUCT KIT, 25" DIA. (ATDPB25DK)

SEE PAGES 26 & 27 FOR MORE INFORMATION

ATDPBC26DD SIDE DOWN DRAFT PLENUM KIT

(shown on booth above)

Features:

- Required when using direct "gas fired" air make up (heater) with paint booth
- Can be installed to new or existing side down draft paint booths
- Heavy-duty precision punched 18 Ga. panel construction
- Bright white powder coat panel finish inside and out
- Convenient 5/16" bolt and nut assembly
- Assembly hardware and sealant included



ATDSDDLED SIDE- & SEMI-DOWN LED LIGHTING UPGRADE KIT

Features:

- Long lasting, energy efficient LED industrial lighting
- Reduces paint booth operational costs
- Increases booth brightness
- Two row LEDs providing 5,000K CCT
- UL/ETL listed 120-277V AC (50/60Hz) electrical
- Direct replacement for standard fluorescent light fixtures




**ATDPBAF0F3P (3 PHASE)
ATDPBAF0F1P (1 PHASE)
3 PHASE OPEN FRONT PAINT BOOTH**

Features:

- Typically ships within 48 hours!
- Commercial grade design for optimal air flow & lighting coverage
- Deluxe control panel included
- White powder coat panel finish (inside & outside)
- Heavy duty precision punched 18 gauge panel construction
- Convenient 5/16" bolt & serrated lock nut assembly
- UL listed dayton 24" tube-axial exhaust fan w/ spark resistant fan blades
- NEMA rated 2hp-3 phase – 230/460vac-60hz motor standard
- Premium AFC exhaust filters
- LDPI industrial light fixtures w/ inside access hinged glass door
- (2 ea.) LDPI industrial (Cls1 / Div 2) light fixtures – UL & ETL (Groups A, B, C & D)
- True 'daylight color' w/ GE T8 48" florescent lamps 32w – 2900 lumens, 5000k
- Optimal air flow w/ CFM 7,983 @ .5 Static pressure
- All assembly hardware, manometer & sealant included
- Meets and/or exceeds all applicable OSHA & NFPA 33 regulations
- Easy to install, operate & maintain
- 1 phase electrical configuration (optional)
- 8" exhaust duct kit (25" diameter) (optional)
- LED lighting upgrade kit (optional)

Specifications:

- Inside dimensions: 13' W x 8'-6" H x 7'-6" D
- Outside Dimensions: 13'-4" W x 8'-10" H x 10'-2" D
- Fan/Motor: 24" Tube Axial Fan, 2HP-3HP-230/460VAC-60HZ, Non-Spark, NEMA Rated
- CFM: 7,983 @ .5 Static Pressure
- Lighting: (2) 48" 32W, T8 / 4 bulb light fixtures, UL & ETL Listed CLS 1, Div 2 (Groups A, B, C, & D)



**PSB-25DUCTKIT-8 KIT ASY
25" EXHAUST DUCT KIT FOR CROSS
FLOW, OPEN FRONT AND SIDE
DOWNDRAFT PAINT BOOTHS**

Features:

- Provides Duct Work to Properly Exhaust Paint Booths with 25" Diameter Exhaust
- 20 Gauge Galvanized Hammer Seamed 'Plain Pipe' Ducting
- One Duct End Corrugated for Easy Assembly
- Fan Connection Ring
- 36" H x 25" Dia. Solid Duct with 32" H x 17" W Clean-Out Door
- 36" H x 25" Dia. Solid 'Center' Duct
- 24" H x 25" Dia. Auto Roof Ventilator (ARV) Protects from Rain and Snow
- Self-Tapping Screw Assembly
- Extend Duct Kit Height with Additional 'Center' Duct Section



INCLUDES:



DELUXE CONTROL PANEL



HIGH QUALITY 24" TUBE-AXIAL
EXHAUST FAN W/ SPARK
RESISTANT BLADES

ALSO AVAILABLE:

- LED LIGHTING UPGRADE KIT
(PSB-PMROFB-LED UPGRDKIT)



INDUSTRIAL LIGHT FIXTURES WITH INSIDE ACCESS HINGED GLASS DOOR



PREMIUM EXHAUST FILTERS

ATDPBH3P (3 PHASE) ATDPBH1P (1 PHASE) DIRECT FIRED HEATING SYSTEM


Features:

- Variflow Technology
- Exhaust VFD fused and wired
- Vertical/side discharge configuration
- Single point connection
- White powder coat finish
- ETL listed control panel
- Exhaust VFD fused and wired
- Hour meter
- Time display shows cycle time and elapsed time
- Truly variable air flow
- Interlock status indicator lights
- 30 ft. umbilical cord
- Easy-to-use controls with control panel messages
- Includes vertical stand/filter box

Specifications:

- Fuel: NG or LP
- BTUH: 1.2M
- Gas Train: 1"
- CFM: 13,000
- Gas Pressure: 1,715 lbs.
- Intake Motor: 230V, 10 Hp, 3PH
- Exhaust VFD: 230V, 5 Hp, 3PH
- Ship Weight: 1,395 lbs.
- Package Size: 98" L x 65" W x 54" H

*Contact your distributor for full Single Phase configuration specifications

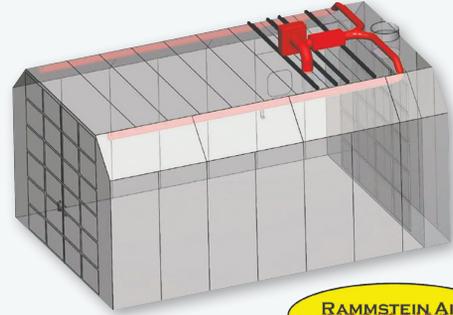

ATDPBH30K3P (3 PHASE) ATDPBH30K1P (1 PHASE) ELECTRIC HEATING SYSTEM

Features:

- Easy to operate and maintain
- Economical, energy efficient paint booth heating solution
- Deluxe control panel included
- Pre-heat, flash-off, spray and bake select modes
- Temperature Rise: 30° F in 10 minutes / 50° F in 50 minutes
- Single point connection with umbilical cord
- Intake filter and duct package included
- 2 Hp blower (208V AC or 230V AC, 3 PH, 6.3A)
- 30kW electric heater (208V AC or 230V AC, 3 PH, 85A)
- Unique pulsing mechanism with pneumatic actuators
- Standard 3 Phase electrical (ATDPBH30K3P)
- Optional 1 Phase electrical (ATDPBH30K1P)
- Patent Pending design

Specifications:


- Fuel: Electric
- Blower Motor: 2 Hp, 208V AC or 230V AC, 3 PH, 6.3A
- Heating Element: 30kW, 208V AC or 230V AC, 3 PH, 85A
- Temperature Rise: Approx. 30° F in 30 minutes/50° F in 50 minutes
- Paint Spray Booth Model Usage: Cross Flow, Side Down and Semi-Down Draft
- Ship Weight: 560 lbs.

*Contact your distributor for full Single Phase configuration specifications

ATDPNTRM3 (3 PHASE) ATDPNTRM1 (1 PHASE) DELUXE PAINT MIXING ROOM

Features:

- Commercial grade design for optimal airflow and lighting coverage
- Deluxe control panel included
- Bright white powder coat panel finish inside and outside
- Optional door placement to side or front of room
- Pre-hung 36" W personnel door with viewing window
- Heavy-duty precision punched 18 Ga. panel construction
- Convenient 5/16" bolt and serrated lock nut assembly
- UL Listed Dayton 12" Tube-Axial exhaust fan with spark-resistant fan blades
- NEMA rated 1/2 Hp, 3PH, 230/460V AC, 60Hz motor standard
- Premium AFC intake and exhaust filters
- LDPI Industrial light fixtures with inside access hinged glass door
- (2 each) LDPI Industrial (Class 1/Division2) light fixtures - UL and ETL (Groups A, B, C and D)
- True daylight color with GE T-8 48" fluorescent lamps 32W, 2900 lumens, 5000K
- Optimal air flow with CFM 1,429 @ .5 static pressure
- Inside Dimensions: 10' L x 8' W x 8' H
- Assembly hardware, manometer and sealant included
- Meets or exceeds all applicable OSHA and NFPA 33 regulations
- Easy to install, operate and maintain



ATDPNTRM3 Specifications:

- Outside Dimensions: 12' 6" L x 8' 4" W x 9' 4" H
- Inside Dimensions: 10' L x 8' W x 8' H or 8' L x 10' W x 8' H
- Fan / Motor: 12" Tube Axial Fan, 1/2 Hp, 3 PH, 208-230/460V AC, 60Hz, Non-Spark, UL listed, NEMA Rated
- CFM: 1,429 @ .5 Static Pressure
- Light Fixtures: (2 ea.) 48" 32-Watt T8, 4 bulb light fixtures; UL and ETL Listed; Class 1, Division 2 - Groups A, B, C & D
- Lamps: (8 ea.) T8 Fluorescent, 32-Watt, 5000K, 48" long

ATDPNTRM1 Specifications:

- Outside Dimensions: 12' 6" L x 8' 4" W x 9' 4" H
- Inside Dimensions: 10' L x 8' W x 8' H or 8' L x 10' W x 8' H
- Fan / Motor: 12" Fan, 1/2 Hp, 1 PH, 208-230V AC, 60Hz, Non-Spark, UL listed, NEMA Rated
- CFM: 1,429 @ .5 Static Pressure
- Light Fixtures: (2 ea.) 48" 32-Watt T8, 4 bulb light fixtures; UL and ETL Listed; Class 1, Division 2 - Groups A, B, C & D
- Lamps: (8 ea.) T8 Fluorescent, 32-Watt, 5000K, 48" long



**ATDDUCT
EXHAUST DUCT KIT FOR
ATDPNTRM1 AND ATDPNTRM3**

Features:

- Provides duct work to properly exhaust all ATD Paint Mixing Rooms
- 20 Ga. galvanized hammer seamed "plain pipe" ducting
- One duct end corrugated for easy assembly
- (1) Fan Connection Ring
- (1) 36" H x 13" Dia. Solid Duct with 32" H x 17" W clean out door
- (1) 36" H x 13" Dia. Solid "Center" Duct
- (1) 24" H x 13" Dia. Auto Roof Ventilator (ARV)
- Self-tapping screw assembly
- Extend duct kit height with additional "center" duct section



**PSB-PMROFB-LED-UPGRDKIT
MIXING ROOM & AF OPEN FRONT LED
LIGHTING UPGRADE KIT**

Features:

- LDPI LED lighting upgrade kit for mixing room & open front booth
- Long lasting, energy efficient LED industrial lighting
- Reduces paint booth operational costs
- Increases booth brightness
- Two row LEDs providing 5,000k CCT
- UL/ETL listed 120-277VAC (50-60Hz) electrical
- Direct replacement for standard fluorescent light fixtures



**PU-110V-S-K 110V - SHORT TANK
PU-110V-L-K 110V - LONG TANK
PU-220V-L-H 220V - LONG TANK W/OVERHEAD KILL SWITCH
PU-220V-L-H-X 220V - LONG TANK, NO CUT OFF
DURO POWER UNITS**

Features:

- Superior performance and durability
- Power Port 9/16"-18 O-ring
- Electric/hydraulic operation
- Mounting hardware included
- Manual release valve
- Power cord (no plug) on PU-220V-L-H-X
- Power cord with grounding plug on PU-110V-S-K and PU-110V-L-K

PU-110V-S-K

- Specifications:**
- Motor: 2.5 Hp
 - Amps: 20
 - RPM: 3450
 - PSI: 3050
 - Tank Capacity: 1.5 Gal.
 - Power: 115V AC, 60Hz, 1 PH

PU-110V-L-K

- Specifications:**
- Motor: 2.5 Hp
 - Amps: 20
 - RPM: 3450
 - PSI: 3050
 - Tank Capacity: 3.5 Gal.
 - Power: 115V AC, 60Hz, 1 PH

PU-220V-L-H

- Specifications:**
- Motor: 2.5 Hp
 - Amps: 14.5 - 16.5
 - RPM: 3450
 - PSI: 3050
 - Tank Capacity: 3.5 Gal.
 - Power: 208-230V AC, 60Hz, 1 PH

PU-220V-L-H-X

- Specifications:**
- Motor: 2.5 Hp
 - Amps: 14.5 - 16.5
 - RPM: 3450
 - PSI: 3050
 - Tank Capacity: 3.5 Gal.
 - Power: 208-230V AC, 60Hz, 1 PH



**PU-AC-115V-1.5-3050 115V - SHORT TANK
PU-AC-115V-3.5-3050 115V - LONG TANK
PU-AC-220V-3.5-3050 220V - LONG TANK, NO CUT OFF
DURO MET CERTIFIED POWER UNITS**

Features:

- MET/UL/CSA Certified
- Superior performance and durability
- Electric/hydraulic operation
- Mounting hardware included
- Manual release valve
- Power Port 9/16-18 O-ring
- Power cord with grounding plug on PU-AC-115V-1.5-3050 and PU-AC-115V-3.5-3050

PU-AC-115V-1.5-3050

- Specifications:**
- Motor: 1.5 Hp
 - Amps: 15
 - RPM: 3450
 - PSI: 3050
 - Tank Capacity: 1.5 Gal.
 - Power: 115V AC, 60Hz, 1 PH

PU-AC-115V-3.5-3050

- Specifications:**
- Motor: 1.5 Hp
 - Amps: 15
 - RPM: 3450
 - PSI: 3050
 - Tank Capacity: 3.5 Gal.
 - Power: 115V AC, 60Hz, 1 PH

PU-AC-220V-3.5-3050

- Specifications:**
- Motor: 3 Hp
 - Amps: 14-15
 - RPM: 3450
 - PSI: 3050
 - Tank Capacity: 3.5 Gal.
 - Power: 208-230V AC, 60Hz, 1 PH



**PU-110V-S-S 110V AC - SHORT TANK
PU-110V-L-S 110V AC - LONG TANK
PU-S-AB-1270 220V AC - LONG TANK W/OVERHEAD KILL SWITCH
SPX ETL CERTIFIED POWER UNITS**

Features:

- ETL/UL/CSA Certified
- Electric/hydraulic operation
- Mounting hardware included
- Manual release valve
- Power Port 9/16-18 O-ring
- Power cord (no plug) on PU-S-AB-1270
- Power cord with grounding plug on PU-110V-S-S and PU-110V-L-S

PU-110V-S-S

- Specifications:**
- Motor: 1 Hp
 - Amps: 15
 - RPM: 3450
 - PSI: 2610
 - Tank Capacity: 1.5 Gal.
 - Power: 115V AC, 60Hz, 1 PH

PU-110V-L-S

- Specifications:**
- Motor: 1 Hp
 - Amps: 15
 - RPM: 3450
 - PSI: 2610
 - Tank Capacity: 3.5 Gal.
 - Power: 115V AC, 60Hz, 1 PH

PU-S-AB-1270

- Specifications:**
- Motor: 2 Hp
 - Amps: 15 - 18
 - RPM: 3450
 - PSI: 2755
 - Tank Capacity: 3.5 Gal.
 - Power: 230V AC, 60Hz, 1PH





160 Enterprise Drive | Wentzville, MO 63385 | www.atdtools.com

©2025 ATD Tools, Inc. All rights reserved. Trademarks of companies mentioned herein appear for identification purposes only and are the property of their respective companies.



ATD-20110

8 05510 20110 3