




PAIN**T**, BODY & EQUIPMENT



Since 1977, ATD Tools, Inc. has focused on providing professional automotive tools and equipment at competitive prices. After over forty years, we are still committed to providing the quality tools you need at a price you can afford.

Our tools and equipment are quality control tested at the manufacturer, by independent labs and in the field to ensure they meet the performance and durability professional mechanics demand today and will continue to demand for years to come.

Paint Spray Guns	3, 4
Spray Gun Accessories	5, 6
Masking Machines.....	7
Heat Guns	8
Rivet Nut Setting Kits	8
Air Riveters	8
Hand Riveters	9
Riveter Assortments.....	9
Work Stands	10, 11
Dent Pullers	11
Body Tools	12
Trim Tools.....	13
Hand Files & Sanders.....	13
Surface Prep Discs	14
Paint Spray Booths.....	15

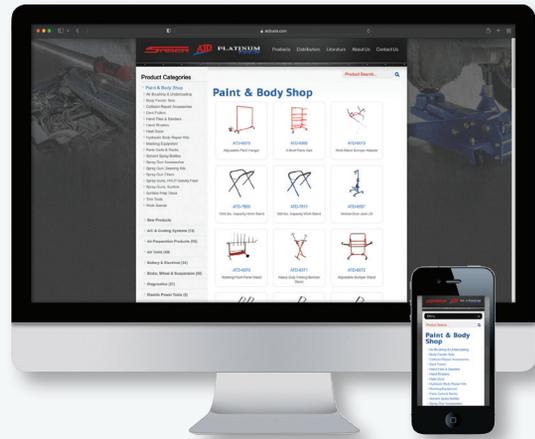

Visit us online at www.atdtools.com to view the full line of products available.

A pdf version of this catalog along with other informational pdf files are available online under the "Literature" tab.



ATD-6900 9-PC. HVLP SPRAY GUN SET

Features:

- Guns have stainless steel needle and nozzle sets
- Knob for spray pattern adjustment
- Operating pressures of 15-45 psi
- Air inlet: 1/4"
- Air consumption: 7.0 to 9.0 CFM
- Meets EPA NESHAP 6H rules for compliance
- Shipping Weight: 9.2 lbs.

Set Contains:

- 1.8mm Primer Spray Gun (ATD-6902)
- 1.4mm Topcoat Spray Gun (ATD-6901)
- 1.0mm Touch-up Spray Gun (ATD-6903)
- (2) 1L Aluminum Cups (ATD-6900-09, ATD-6900-08 Lid for cup)
- 125cc Stainless Steel Cup (ATD-6900-21, ATD-6900-20 Lid for cup)
- Locking Pressure Regulator (0-180 psi, 0-12 BAR)
- Paint Gun Filter
- Cleaning Kit: spanner wrench, hex wrench, brush, (2) filters



ATD-6901 1.4MM HVLP TOP COAT SPRAY GUN

Features:

- All-purpose spray paint gun
- Produces high quality paint atomization
- High volume, low pressure minimizes overspray
- Fully adjustable wide fan pattern control
- 1L Aluminum Cup

Specifications:

- 1.4mm Nozzle
- Operating Pressure: 29-50 psi
- Average Air Consumption: 6-9 CFM
- Air Inlet Thread: 1/4" NPSM
- Cup Thread: M16 x 1.5
- Net Weight with Cup: 1.8 lbs.
- Required Compressor: 2 Hp
- Maximum Pattern @ 8" Distance: 11"
- Meets EPA NESHAP 6H rules for compliance




ATD-6906 1.3MM HVLP TOP COAT SPRAY GUN

Features:

- All-purpose spray paint gun
- Produces high quality paint atomization
- High volume, low pressure minimizes overspray
- Fully adjustable wide fan pattern control
- 1L Aluminum Cup

Specifications:

- 1.3mm Nozzle
- Operating Pressure: 29-50 psi
- Average Air Consumption: 4.2-7.1 CFM
- Air Inlet Thread: 1/4" NPSM
- Net Weight with Cup: 1.8 lbs.
- Required Compressor: 2 Hp
- Maximum Pattern @ 8" Distance: 9.8"
- Meets EPA NESHAP 6H rules for compliance

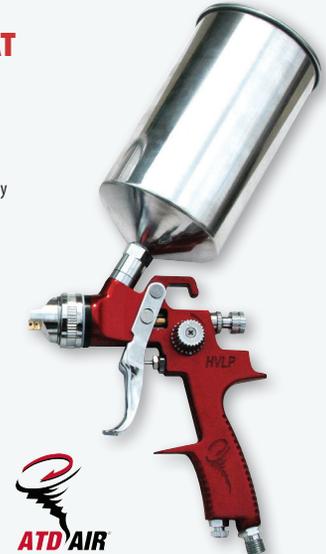

ATD-6902 1.8MM HVLP PRIMER SPRAY GUN

Features:

- All-purpose spray paint gun
- Produces high quality paint atomization
- High volume, low pressure minimizes overspray
- Fully adjustable wide fan pattern control
- 1L Aluminum Cup

Specifications:

- 1.8mm Nozzle
- Operating Pressure: 29-50 psi
- Average Air Consumption: 6-9 CFM
- Air Inlet Thread: 1/4" NPSM
- Cup Thread: M16 x 1.5
- Net Weight with Cup: 1.8 lbs.
- Required Compressor: 2 Hp
- Maximum Pattern @ 8" Distance: 11"
- Meets EPA NESHAP 6H rules for compliance




ATD-6903 1.0MM MINI HVLP TOUCH-UP SPRAY GUN

Features:

- Perfect for small jobs, detail and touch-up work
- Produces high quality paint atomization
- High volume, low pressure minimizes overspray
- Fully adjustable wide fan pattern control
- 125cc Stainless Steel Cup

Specifications:

- Nozzle Size: 1.0mm
- Operating Pressure: 29 psi
- Average Air Consumption: 6-9 CFM
- Air Inlet Thread: 1/4" NPSM
- Cup Thread: M14 x 1.0
- Net Weight with Cup: 0.75 lbs.
- Required Compressor: 1 Hp
- Maximum Pattern @ 8" Distance: 9"
- Meets EPA NESHAP 6H rules for compliance

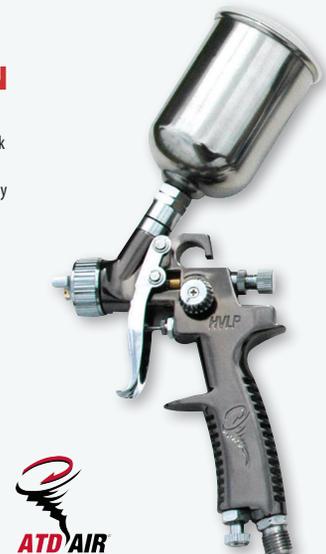



**ATD-6849
PRECISION AIR BRUSH KIT**

Features:

- Dual-Action Trigger Air/ Fluid Control
- Precision machined nozzle
- Ideal for automotive & motorcycle graphics, etc.

Includes:

- Air brush
- (2) 22cc glass jars
- Adapter
- Holder
- 5 ft. Air hose
- Shipping Weight: 1.0 lbs.



**ATD-6810
1.8MM SUCTION
STYLE SPRAY GUN**

Features:

- All-purpose spray paint gun
- Easy to clean design
- 2-piece construction featuring exclusive air valve design
- Fully adjustable wide fan pattern control
- 1 qt. capacity dripless cup
- ATD-6810-36 complete lid assembly
- ATD-6810-49 cup and lid assembly
- Nozzle Size: 1.8mm
- Operating Pressure: 45 - 60 psi
- Average Air Consumption: 6 - 8.8 CFM
- Air Inlet Thread: 1/4" NPT
- Required Compressor: 3 Hp
- Maximum Pattern @ 8" Distance: 11"
- Shipping Weight: 2.42 lbs.



**ATD-6822
1-QUART DRIPLESS CUP
ASSEMBLY**

Features:


- One quart capacity
- Drip-free design
- Can be used with ATD and most other suction feed spray guns with a 3/8" NPS(M) fluid inlet
- Spun aluminum construction



**ATD-6552
1.0 LITER SOLVENT
SPRAY BOTTLE**

Features:

- Capacity: 1 Liter (35 fl. oz.)
- High-Density Polyethylene material provides greater durability
- Viton® FKM O-rings offer outstanding resistance to solvents including acid-based solutions
- Easy to read markings on the side with both fluid ounce and liter gradations
- Sprayer resists many solvents and mineral oils. It features a high-quality Viton® seal making it ideal for brake cleaner solvents, tire cleaners, metal parts degreasers as well as many common industrial solvents including toluene, xylene, hexanes, kerosene, mineral turpentine, and more.
- Sprayer is NOT suitable for acetones, acetates, ammonias, keytones, lacquer thinners, etc.

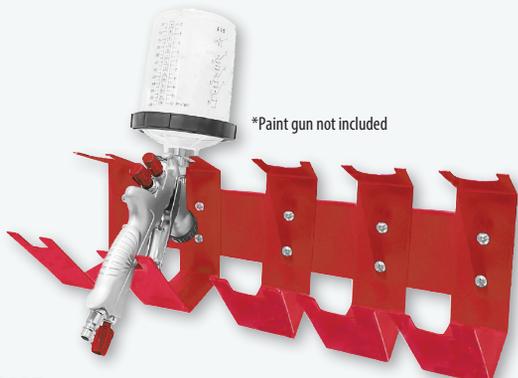


*Paint gun not included

**ATD-6807
5-GUN MAGNETIC PAINT GUN HOLDER**

Features:

- Perfect for paint booths, mixing rooms, prep stations, etc.
- Designed to hold (5) gravity-feed paint guns*
- Magnetic design for portability with (12) powerful magnets
- Heavy-duty powder-coated steel construction

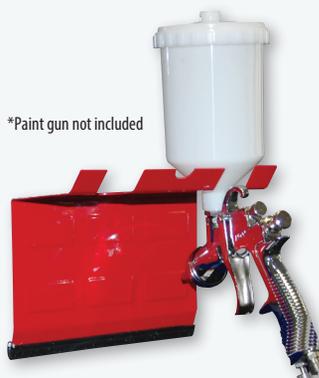

*Paint gun not included

**ATD-6805
MAGNETIC PAINT GUN HOLDER**

Features:

- Perfect for paint booths, mixing rooms, prep stations, etc.
- Designed to hold (2) gravity feed paint guns
- Magnetic design for portability
- Heavy-Duty steel construction with (6) powerful magnets



ATD-6806 5-GUN PAINT GUN HOLDER

Features:

- U-shaped hooks help hang five spray guns at a time with or without cups
- Vinyl-coated hooks prevent damage to paint guns
- Rack holds cups and accessories
- Easily installs in mixing room, paint booth or prep area
- Holder comes with screws and magnetic mounts for multiple hanging options



ATD-6861 GRAVITY FEED SPRAY GUN HOLDER

Features:

- Allows painter to fill gravity feed gun without assistance
- Also a convenient holder for paint gun between jobs
- Rugged metal construction
- 7.48" x 3.77" x 15.35"
- Shipping Weight: 2.0 lbs.



ATD-68541 .125 LITER PLASTIC CUP

Features:

- Replacement cup for touch-up gravity feed spray guns
- .125 Liter (125cc) capacity
- Will not drip when spraying in any position
- Cup Thread: M14 x 1.0
- Shipping Weight: 0.6 lbs.



ATD-6863 .6 LITER PLASTIC CUP

Features:

- Replacement cup for gravity feed spray guns
- 0.6 Liter capacity
- Cup Thread: M14 x 1.0
- Will not drip when spraying in any position



ATD-6829 1.0 LITER ALUMINUM CUP WITH LID

Features:

- Replacement aluminum cup with lid for gravity feed spray guns
- 1.0 Liter capacity
- Cup Thread: M14 x 1.0
- ATD-6839 - Lids for ATD-6829 paint cup



ATD-6838 .6 LITER ALUMINUM CUP WITH LID

Features:

- Replacement aluminum cup with lid for gravity feed spray guns
- 0.6 Liter capacity
- Cup Thread: M14 x 1.0



ATD-6839 PLASTIC LIDS FOR .6L ALUMINUM CUPS

Features:

- 3 pack of plastic lids for aluminum paint gun cups



ATD-6926 LOCKING AIR REGULATOR

Features:

- Locking adjustment knob
- Pressure gauge
- 1/4" fittings
- Operating Temperature Range: 41° F to 140° F
- Adjustment Range: 0-150 psi
- Shipping Weight: 0.4 lbs.



SPRAY GUN ACCESSORIES



ATD-6825 DIGITAL PRESSURE REGULATOR

Features:

- Ensures accurate measurement of air pressure to spray guns or other air tools up to 160 psi
- Reduces overspray, saving material
- Large LCD display is easy to read
- Automatic shut off conserves battery life and battery is replaceable
- 1/4" universal thread swivel nut fits most spray guns or 1/4" universal thread male air inlet fittings
- Impact-resistant aluminum housing for durability
- Solvent resistant based on normal usage

ATD-7820 MINI IN-LINE DISPOSABLE DESICCANT DRYER

Features:

- Ideal for spray guns (point-of-use)
- 40 micron, porous bronze element removes fine dirt particles, as oil removing media removes oil vapor and desiccant beads absorb water vapor
- Attaches directly to spray gun or mini regulator located on spray gun
- Unit is bi-directional with 1/4" NPT
- Blue desiccant beads lower the dew point to -30°F and remove all water vapor. Bead color turns pink when it is time to replace filter/dryer.

Specifications:

- Pipe Size (NPT): 1/4"
- Max. Flow Capacity: 15 CFM
- Max Pressure: 125 psi
- Max Temperature: 130°F
- Quantity: 2-pack



ATD-6848 MASTER SPRAY GUN CLEANING KIT

Includes:

- Long-handled Angle Brush
- Long-handled straight Fiber Brush
- Medium sized Fiber Brush
- Medium sized Wire Brush
- (5) Fine Fiber Brushes
- (2) Hobby Knife Holders
- (6) Fine Points
- Plastic-handled Brush
- (3) Detail Brushes
- Bottle of Cleaning Solution
- Shipping Weight: 1.0 lbs.

ATD-7814 PAINT SPRAY GUN FILTERS

Features:

- Reduces paint defects
- Traps moisture, rust, scale and oil aerosols that pass through conventional filters
- (15) filters in a fishbowl

Specifications:

- 1/4" NPT fittings
- Removal Rating: .01 Microns
- Max Flow @ 80 psi: 30 CFM
- Maximum Pressure: 100 psi



ATD-7812 PAINT SPRAY GUN FILTERS

Features:

- Reduces paint defects
- Traps moisture, rust, scale and oil aerosols that pass through conventional filters
- Pack of (3) filters

Specifications:

- 1/4" NPT fittings
- Removal Rating: .01 Microns
- Max Flow @ 80 psi: 30 CFM
- Maximum Pressure: 100 psi



ATD-6929 SPRAY GUN TRAPPER FILTERS

Features:

- Universal filters for Leonardo and other spray paint guns
- 12 pack
- Diameter: .46" (11.6 mm)
- Overall Length: 1.592" (40.45 mm)
- Filter Length: .966" (24.54 mm)
- Shipping Weight: 0.1 lbs.



ATD-6618 SPRAY GUN CLEANING KIT

Features:

- Kit contains (5) brushes and assorted picks which can be used to remove paint from spray guns and cups
- Also includes specially formulated lubricant for spray gun needles
- Shipping Weight: 0.3 lbs.





ATD-6558
2-IN-1 MASKING FILM DISPENSER

Features:

- One person operation to quickly and smoothly cut film
- Fits standard film rolls (max width: 47.2" / max diameter: 11.8")
- Large diameter wheels for easy maneuvering
- Powder coated finish for corrosion resistance
- Assembled size: 50" x 23.6" x 28.3"
- Designed for masking film rolls with core

ATD-6559
MASKING FILM DISPENSER

Features:

- Holds box firmly as you pull sheeting
- Keep sheeting clean and dry
- 8" rubber wheels allow easy movement in work area
- Stands upright for convenient storage
- Fits box lengths from 14" - 55", and 6.7" x 6.7" square



ATD-6567
36" MASKER

Features:

- Handy, portable and lightweight 1" tubular steel design
- Holds rolls of masking paper up to 36" wide
- Wall mounting kit included

ATD-6561
18" MASKING MACHINE

Features:

- Heavy-duty steel construction
- Includes bars for (2) paper rolls and (4) tape rolls
- Large bottom storage tray
- Side tray for holding supplies
- 8" wheels for easy maneuvering
- Shipping Weight: 29 lbs.



ATD-6565
18" MASKER

Features:

- Handy, portable and lightweight 1" tubular steel design
- Holds rolls of masking paper up to 18" wide
- Wall mounting kit included

ATD-6563
TREE STYLE MASKING MACHINE

Features:

- Heavy-duty steel construction
- Holds (4) rolls of tape
- Holds (4) rolls of masking paper:
- (2) 12" rolls and (2) 18" rolls
- Never needs adjusting, always keeps tape and paper aligned
- 6" tires for easy maneuvering
- Shipping Weight: 28 lbs.




ATD-3736 DUAL TEMPERATURE HEAT GUN KIT

Features:

- Great for stripping paint, removing decals and stripes, shrinking wire wrap, etc.
- (2) Heat settings: 700° F and 925° F
- Wattage: 1000W (low setting) 1500W (high setting)
- Three-position rocker switch: high/off/low
- UL & cUL listed

Includes:

- Dual temperature heat gun
- Reduction nozzle
- Reflector nozzle
- Large deflector nozzle
- Small deflector nozzle
- Molded plastic storage case

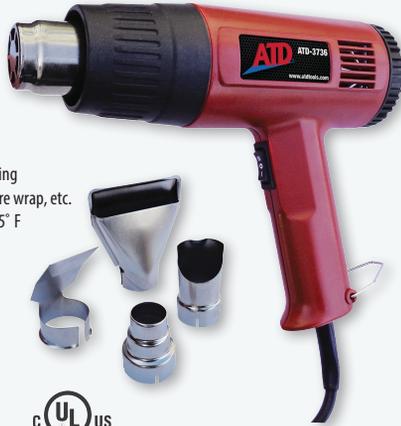

ATD-3739 DUAL TEMPERATURE HIGH OUTPUT HEAT GUN

Features:

- Low and high heat settings with a temperature range from 158° F to 1,112° F
- Perfect for curing adhesives, removing decals/strips, drying body fillers/paint, shrink tubing, etc.
- Durable die-cast metal housing
- Adjustable, removable stand for cool down or hands-free use

Specifications:

- Temperature Range: 158° F to 1,112° F
- CFM: 14 Low, 17 High
- Voltage: 120V
- Wattage: 1,500
- Cord: 6 ft. length, 14AWG
- cETLus approved



ATD-5845 12" HAND RIVET NUT SETTING KIT

Features:

- Perfect for many automotive, electronic or industrial applications
- Use wherever load bearing threads are required in thin materials
- Quick, reliable and low cost method of adding threads without surface damage
- Tool-less quick-change design allows for quick and easy mandrel and nose piece changes

Includes:

- 12" Heavy-Duty Nut/Thread Rivet Tool with double compound hinges for maximum leverage and smooth operation
- (1 each) Metric Mandrel/Nosepiece in M5, M6 and M8
- (1 each) SAE Mandrel/Nosepiece in 10-24, 1/4"-20 and 5/16"-18
- (10 each) of the following Rivet Nuts in M5, M6, M8, 10-24, 1/4"-20 and 5/16"-18
- Wrench



ATD-5855 PNEUMATIC RIVET NUT SETTING KIT

Features:

- Includes (8) mandrels/nosepieces in the following sizes: M4, M5, M6, M8, M10, 1/4", 5/16", 3/8"
- Instantly set rivet nuts with the pull of the trigger
- Quickly un-thread set rivet nuts by operating free spinning rear wheel
- 2,680 lbs. of instant air-hydraulic pulling force

Specifications:

- Tool Stroke: 6.5mm
- Air Consumption: 3 CFM
- Air Inlet: 1/4" NPT
- Max Capacity: M10 (3/8") steel and aluminum rivet nuts, M6 (1/4") stainless rivet nut



ATD-5850 3/16" HYDRAULIC AIR RIVET GUN

Features:

- Quality construction for reliable and quiet operation
- Quick release air valve for fast cylinder return
- Performs well at any angle
- Lightweight, comfortable handle prevents user fatigue
- Includes (4) nose pieces: 3/32", 1/8", 5/32" and 3/16"
- For use with 3/32", 1/8", 5/32" and 3/16" aluminum rivets
- Can also be used with 3/32", 1/8" and 5/32" steel rivets

Specifications:

- Air Inlet: 1/4" NPT
- Air Hose Size: 3/8" ID
- Average Air Consumption: 4 CFM
- Required Air Pressure: 90-120 psi
- Rivet Capacity: 3/16"
- Pulling Force: 1,874 lbs.
- Overall Length: 10-5/8"



ATD-5851 1/4" HYDRAULIC AIR RIVET GUN

Features:

- Powerful and reliable high speed production tool
- Quick release air valve for fast cylinder return
- Performs well at any angle
- Small size and light weight allow use in hard-to-reach areas without user fatigue
- Includes (4) nosepieces: 1/8", 5/32", 3/16" and 1/4"
- Can be used with 1/8", 5/32", 3/16" 1/4" aluminum and steel rivets
- Nosepieces conveniently store underneath rubber base

Specifications:

- Air Inlet: 1/4" NPT
- Air Hose ID Size: 3/8"
- Average Air Consumption: 4 CFM
- Required Air Pressure: 90-120 psi
- Rivet Capacity: 1/4"
- Pulling Force: 2,646 lbs.
- Overall Length: 10-7/8"
- Shipping weight: 4.5 lbs





ATD-5842
1/4" HEAVY-DUTY HAND RIVETER

Features:

- Extra long handles provide excellent leverage
- Includes (5) nosepieces to set 1/8", 5/32", 3/16", 7/32" and 1/4" steel and aluminum rivets
- 2-1/4" nose
- Heavy-duty metal construction
- Overall Length: 20-3/4"
- Shipping Weight: 4.8 lbs.



ATD-5835
13" HEAVY-DUTY HAND RIVETER

Features:

- Ideal for tough rivet jobs in hard-to-reach areas
- Shortest long-arm riveter capable of installing 1/4" stainless steel rivets
- Double compound hinges maximize leverage
- Chrome Moly steel 3-piece jaws for long life
- Includes (5) nosepieces
- Core collection bottle for safety and easy waste disposal



ATD-334
115-PC. RIVET NUT ASSORTMENT

Specifications:

- Zinc Plated Steel Rivets

Includes:

- (20) M4 Rivet Nuts
- (10) M8 Rivet Nuts
- (15) 5/16" Rivet Nuts
- (20) M5 Rivet Nuts
- (10) M10 Rivet Nuts
- (10) 3/8" Rivet Nuts
- (10) M6 Rivet Nuts
- (20) 1/4" Rivet Nuts

For Use With:

- ATD-5845 - 12" Hand Rivet Nut Setting Kit
- ATD-5855 - Pneumatic Rivet Nut Setting Kit



ATD-337
150-PC. RIVET NUT ASSORTMENT

Specifications:

- Galvanized Steel Rivets

Includes:

- (30) M5x13mm Rivet Nuts
- (30) 10-24 Rivet Nuts
- (25) M6x15mm Rivet Nuts
- (25) 1/4"-20 Rivet Nuts
- (20) M8x18mm Rivet Nuts
- (20) 5/16"-18 Rivet Nuts

For Use With:

- ATD-5845 - 12" Hand Rivet Nut Setting Kit
- ATD-5855 - Pneumatic Rivet Nut Setting Kit



ATD-341
300-PC. 1/4" ALUMINUM BLIND RIVET ASSORTMENT

Features:

- Dome head rivets can be installed without access to the back side of the item being riveted
- High quality aluminum material provides strength and durability
- Use with ATD or other manual or air operated rivet guns

Includes:

- (100) 1/4" x 1/4"
- (100) 1/4" x 3/8"
- (100) 1/4" x 1/2"



ATD-346
500-PC. ALUMINUM BLIND RIVET ASSORTMENT

Features:

- Dome head rivets can be installed without access to the back side of the item being riveted
- High quality aluminum rivet with steel mandrel provides strength and durability
- Use with ATD or other manual or air operated rivet guns

Includes:

- (120) 1/8" x 1/4"
- (70) 3/16" x 5/16"
- (120) 1/8" x 5/16"
- (70) 3/16" x 3/8"
- (120) 1/8" x 3/8"



ATD-6579 MOBILE PANEL STORAGE RACK

Features:

- For safely storing windshields, hoods, doors, sheet metal, etc.
- Holds up to (5) large panels or glass
- Powder-coated steel construction
- Overall size: 47" L x 28" W x 25" H
- (12) 25" Expanded polyethylene (EPE) foam-covered support bars
- (4) 4" polyurethane casters (2 swivel, 2 w/ brake)
- Capacity: 330 lbs.

ATD-6569 3-SHELF PARTS CART

Features:

- (3) adjustable shelves and support arms provide mobile parts storage
- (6) S-hooks
- (4) 4" polyurethane casters (2 locking)

Specifications:

- Dimensions: 74.8" x 41.7" x 30.7"
- Weight: 69.5 lbs.
- Weight capacity per shelf: Bottom and middle shelf: 99 lbs.; Top Shelf: 66 lbs.



ATD-6577 PAINT PREP CART

Features:

- Saves space and reduces waste
- Durable wire shelves
- Powder coated steel construction
- (4) 4" polyurethane casters (2 swivel, 2 w/ brake)
- Assembled dimensions: 66.5" x 50" x 19.68"

Includes:

- (3) Hooks
- (3) Small Bottle Mounts
- (3) Large Bottle Mounts
- Sanding Paper Roll Holder
- Masking Paper Dispenser



ATD-6570 ROTATING PAINT PANEL STAND

Features:


- Universal stand handles fenders, doors, hoods, bumpers
- (8) adjustable bars hold panels securely
- Portable for fast movement from prep to spray booth
- Round handle allows 350° rotation in 16° increments
- Shipping Dimensions: 9.8" x 10.2" x 48.8"
- 200 lbs. capacity
- Shipping Weight: 55.12 lbs.



ATD-6578 WALL MOUNTED BUMPER STAND

Features:

- Holds up to (4) bumper covers
- Powder-coated steel construction
- Size: 59" H x 39" W x 20" D

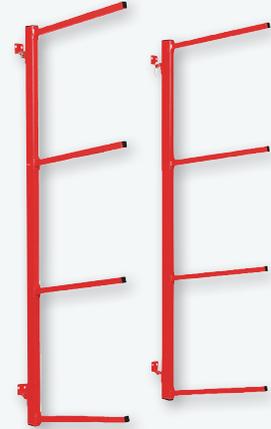

ATD-6571 HEAVY-DUTY FOLDING BUMPER STAND

Features:

- Adjustable stand with extendable support arms holds different bumper types and styles
- Ideal for storage of bumpers prior to preparation and spraying
- Lightweight design with 300 lbs. capacity
- Height range: 41.75" to 48.5"
- Shipping weight: 19.8 lbs




ATD-6575 ADJUSTABLE PAINT HANGER

Features:

- Ideal for painting fenders, doors, tailgates, and hoods
- Durable powder-coated steel tubing
- (6) hooks hold parts for painting or drying
- (4) 4" polyurethane swivel casters, (2) locking

Specifications:

- Total Capacity: 220 lbs.
- Overall Width: 70" x 19.5"
- Height adjusts from 50"-80"

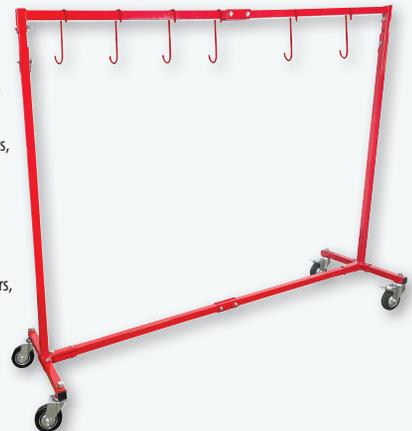

ATD-6572 ADJUSTABLE BUMPER STAND

Features:

- Holds any plastic bumper cover without touching the painted surface
- Cover can be rotated 90° to ensure proper paint coverage
- (5) Locking positions
- Protective rubber boots keep critical areas free of overspray
- (4) Industrial grade casters with (2) locking for zero movement
- Dimensions: 44" W x 30" D x 53" H
- Shipping Weight: 33.07 lbs.



ATD-7811 500 LBS. CAPACITY WORK STAND

Features:

- 500 lbs. capacity
- Lightweight construction
- Steel tubing with 1/2" foam padding wrapped around and down the top of the frame
- Adjustable working height - 22.8" - 37"
- Leg tube length: 30.7"
- Bent tube length: 40.35"
- Steel tubing diameter: 1.10"
- Steel tubing thickness: .05"
- Shipping Weight: 15.2 lbs.



ATD-7800 1000 LBS. CAPACITY WORK STAND

Features:

- 1,000 lbs. capacity
- Lightweight construction
- Steel tubing with 1/2" foam padding wrapped around and down the top of the frame
- Adjustable working height - 22.8" - 37"
- Leg tube length: 30.7"
- Bent tube length: 40.35"
- Steel tubing diameter: 1.25"
- Steel tubing thickness: .08"
- Shipping Weight: 23.8 lbs.



ATD-6573 WORK STAND BUMPER ADAPTER

Features:

- Holds plastic bumpers during prep or spraying
- Universal attachment fits most portable work stands
- Adjusts to different work heights
- Rubber padded support tubes



*Work stand shown is not included



ATD-5160 MUSCLE MAX 10 LBS. HEAVY-DUTY DENT PULLER SET

Includes:

- 10 lbs. slide hammer
- (2) Pipes
- 2-hole pipe
- Hex nut
- Chain and hook
- (5) Plates
- Molded storage case
- 7/8" x 14 thread pitch for accessories
- 26.75" long
- Shipping Weight: 25.3 lbs.

ATD-3045 SLIDE HAMMER PULLER SET

Features:

- Eases removal of flange-type axles, oil seals, bearings and other press fit parts
- Jaws can be set up for 2- or 3-jaw internal or external pulling jobs
- 5 lbs. heavy-duty slide hammer
- 8-function internal or external 3-jaw puller - Range: 1-1/4" to 3-1/8"
- Internal or external 2-jaw puller - Range: 1-1/4" to 3-1/8"
- Puller hook, rear axle puller
- Dent puller
- Special grip wrench adapter
- 5/8" - 18 threaded end
- Molded storage case included
- Shipping Weight: 16.5 lbs.



ATD-7541 HEAVY-DUTY DENT PULLER

Features:

- Heavy-duty dent puller/slide hammer with vinyl cushion finger grip handle
- Puller comes with extra screw and hook for pulling bearings and seals
- Shaft 1/2" x 20 thread
- 1.75 lbs. slide hammer
- Shipping Weight: 3.3 lbs.

ATD-5800A 4-TON HYDRAULIC BODY REPAIR KIT

Features:

- Designed for pushing, spreading and pressing of vehicle body panels as well as various component parts and assemblies
- Auto bleeding pump with pressure gauge
- Heavy-duty case allows for easy storage and transport for use in shop or on the road
- Meets or exceeds ASME PASE 2019 standards

Specifications:

- Ram Capacity: 4 Tons
- Pump Capacity: 8,000 psi
- Ram - Closed Height: 10.5"
- Ram - Extended Height: 15.2"
- Ram Effective Area: 1.1 sq. in.
- Shipping Weight: 44 lbs.



ATD-5810A 10-TON HYDRAULIC BODY REPAIR KIT

Features:

- Designed for pushing, spreading and pressing of vehicle body panels as well as various component parts and assemblies
- Double speed and auto bleeding pump with pressure gauge
- Heavy-duty case allows for easy storage and transport for use in shop or on the road
- Meets or exceeds ASME PASE 2019 standards

Specifications:

- Ram Capacity: 10 Tons
- Pump Capacity: 10,000 psi
- Ram - Closed Height: 12.7"
- Ram - Extended Height: 17.8"
- Ram Effective Area: 2.46 sq. in.
- Shipping Weight: 70.5 lbs.



ATD-5801 10-TON MINI HYDRAULIC RAM

Features:

- Perfect for lifting, pushing, alignment, etc.
- Ideal for tight areas with little clearance
- All steel construction for maximum strength and durability
- (3) extensions can be used individually or together
- For use with ATD or most other manufacturers body repair kits

Specifications:

- Capacity (Ton): 10
- Ram stroke: 1.5"
- Minimum cylinder height: 3.5"
- Maximum cylinder height: 5"
- Cylinder effective area: 2.35 sq.in.



ATD-5802B 5-TON PULL RAM WITH HOOKS

Features:

- Can be used in vertical or horizontal positions to pull, bend or straighten metal

Specifications:

- Capacity: 5 Tons
- Stroke: 5.13"
- Effective Area: 1.14 sq. in.
- Oil Capacity: 3.38 oz.
- Collapsed Length: 20.88"
- Extended Length: 26"
- Outside Diameter: 2.18"
- Operating Pressure: 8,800 psi
- Shipping Weight: 12.1 lbs.

ATD-5812A 10,000 PSI HYDRAULIC FOOT PUMP

Features:

- Perfect power source for many body, frame and alignment applications
- High strength aluminum reservoir is lightweight and corrosion resistant
- Pressure relief valve protects hydraulic components
- Simple foot pedal controls cylinder advance, hold or retract operation
- Greater oil capacity to handle bigger jobs
- Maximum working pressure: 10,000 psi

Specifications:

- Usable Oil Capacity: 98 cu. in.
- Pressure Rating: 10,000 psi
- Air Pressure Rating: 90-145 psi
- Output Flow Rate - No Load: 49.5 cu. in./min.
- Output Flow Rate - @ Load: 7.6 cu. in./min.
- Air Input Port - 1/4"-18 NPTF
- Oil Output Port - 3/8"-18 NPTF
- Shipping Weight: 18 lbs.



ATD-4030 7-PC. HEAVY-DUTY BODY & FENDER TOOL SET

Features:

- Fiberglass hammer handles for long service life
- (3) Body hammers with excellent balance and feel
- (4) Dollies for most common shapes and profiles

Includes:

- Pick Hammer
- Body Hammer
- Bumping Hammer
- Universal Dolly
- Spoon Dolly
- Heel Dolly
- Combination Dolly
- Molded Storage/Carrying Case

ATD-85827 27-PC. TRIM PANEL REMOVAL & SCRAPER TOOL SET



Features:

- Designed for safe removal of door panels, fascia and trim strips, window moldings, dashboard and interior panels & trim, etc.
- Made of impact resistant plastic that will not mar surfaces like metal tools
- Slim design for delicate work in tight areas
- Custom canvas storage pouch keeps tool organized

Includes:

- Wide Scraper Tool
- General Scraper Tool
- Flat Scraper Tool
- General Purpose Wide Edge Tool
- Thin & Flat Tool
- General Purpose Wedge Tool
- General Purpose Pry Tool
- Thin with Pry Tip Tool
- Pry Tool
- Concentrated Scraper Tool
- Curved Scraper Tool
- Tube Scraper Tool
- Angle Scraper Tool
- Emblem Remover
- Rounded Corner Scraper Tool
- Box Corner Scraper Tool
- Sharp Corner Scraper Tool
- Angled Push/Pull Scraper
- Flat Push/Pull Scraper
- Panel Clip Removal Tool
- Large Grommet Pry Tool
- Small Grommet Pry Tool
- Flat Grommet Remover
- Flat Grommet Pry Tool
- Flat Sealant Application Spade
- Interior Button Removal Tool
- Wire Insertion Tool

ATD-8584 11-PC. TRIM REMOVAL TOOL SET



Features:

- Designed for removal of door panels, fascia & trim strips, dashboard & interior panels & trim, window moldings etc.
- Made of impact resistant plastic that will not mar surfaces like metal tools can
- Slim design for delicate work in tight areas

Specifications:

- ATD-85841 - Wide-type Remover
- ATD-85842 - Pull-type Remover
- ATD-85843 - Handy Remover
- ATD-85844 - Narrow-type Remover
- ATD-85845 - Upholstery Clip Remover
- ATD-85846 - Angled Clip Panel Remover
- ATD-85847 - Fork Tip Flat Clip Panel Remover
- ATD-85848 - Clip Panel Remover
- ATD-85849 - Sharp Tip Flat Clip Panel Remover
- ATD-85850 - Panel Remover
- ATD-85851 - Blunt Tip Flat Clip Panel Remover



ATD-8579 BODY CLIP PLIERS

Features:

- These specially designed & patented pliers will remove any clip found on trim, bumpers, etc.
- Steel levers enclosed in plastic handles, prevent scratches & nicks in paint
- Tips have special angle & size that make them the most versatile tool in the clip removal category
- No need to buy (3) pliers for different applications
- A must for body technicians



ATD-2181 DUAL PISTON STRAIGHT LINE SANDER

Features:

- Perfect for feathering body filler on large flat areas
- Two-handle design for comfortable operation
- Dual piston design provides efficient power and prevents stalling

Specifications:

- Strokes per Minute: 2,500
- Pad Size: 2.5" x 15.5"
- Avg. Air Consumption: 6 CFM
- Inlet: 1/4" NPT(f)
- Length: 15.5"
- Weight: 5.29 lbs.



ATD-2182A 6" QUIET DUAL ACTION SANDER

Features:

- Rotary & orbital motion for rapid material removal as well as fine finishing
- Excellent for blending and smoothing filler, feather edging and pre-paint preparation

Specifications:

- Free Speed: 10,000 rpm
- Pad Size: 6"
- Average Air Consumption: 3.3 SCFM
- Air Inlet: 1/4" NPT(F)
- Length: 8.4"
- Weight: 4.08 lbs.

ATD-2088 RANDOM ORBITAL PALM SANDER

Features:

- Low profile design with ergonomic cushion grip
- Random orbital action assures a swirl-free finish
- Variable air speed control
- 3/16" orbit for rapid material removal
- Application: Paint prep and finishing
- Sanding Pad: 6" diameter PSA-style
- Includes: oil, 6" vinyl face pad, wrench, orbital sander and 1/4" male nipple

Specifications:

- Working Pressure: 90 psi
- Free Speed: 10,000 rpm
- Air Inlet Thread: 1/4" NPT
- Hose Size: 3/8"
- Height: 4.5"
- Average Air Consumption: 2.8 CFM
- Maximum Air Consumption (continuous run with load): 5.1 CFM
- Minimum Air Compressor Hp Needed: 2 Hp +
- Net Tool Weight: 2.2 lbs.
- Shipping Weight: 2.8 lbs.



SURFACE PREP DISCS

SURFACE CONDITIONING DISCS

Features:

- Quick Change Surface Conditioning Scrim Black (SCSB) discs with R fastening system
- Recommended for use in applications requiring considerable mechanical strength
- Extremely quick to change
- Fast and heavy abrasive action with high unloading properties
- Compact design fits into hard-to-reach areas
- Type III fastener features a roll-on/roll-off style (equivalent to the 3M® Roloc® fastening style)
- Recommended Applications: plastic products, machinery for the chemical and food industries, stainless steel furniture, automotive, aircraft, and aerospace industries, and stainless steel metal fabricators
- Work Surfaces: Steel, stainless steel, aluminum, titanium and alloys, fiberglass, plastic and glass
- For use with ATD-6601 2" disc holder
- Max rpm: 25,000

Also Available:

- ATD-3150 - 2" Coarse Grit Disc (100 Pack)
- ATD-3151 - 2" Coarse Grit Disc (25 pack)
- ATD-3152 - 2" Medium Grit Disc (25 pack)
- ATD-3153 - 3" Coarse Grit Disc (25 pack)
- ATD-3154 - 3" Medium Grit Disc (25 pack)
- ATD-3155 - 2" Fine Grit Disc (25 pack)
- ATD-3156 - 2" Extra-Fine Grit Disc (25 pack)
- ATD-3157 - 3" Fine Grit Disc (25 pack)
- ATD-3158 - 3" Extra-Fine Grit Disc (25 pack)



ATD-3157



ATD-6602



ATD-6601

2" TYPE III DISC HOLDER

ATD-6602

3" TYPE III DISC HOLDER

Features:

- Medium-density, rubber backup pad is ideal for contour work, feathering and edging into corners
- Type III fastener features a roll-on/roll-off style
- 1/4" x 20 Threads, 2" Rolock Holder
- Shipping Weight: 0.3 lbs.

ALUMINUM OXIDE GRINDING DISCS

Features:

- For general metal & woodworking
- Perfect for light welds & blending surfaces
- Great for sanding & breaking edge applications
- For use with ATD-6601 2" disc holder and ATD-6602 3" disc holder



Also Available:

- ATD-87224 - 2" Aluminum Oxide 24 Grit Grinding Disc (25 Pack)
- ATD-87236 - 2" Aluminum Oxide 36 Grit Grinding Disc (25 Pack)
- ATD-87250 - 2" Aluminum Oxide 50 Grit Grinding Disc (25 Pack)
- ATD-87324 - 3" Aluminum Oxide 24 Grit Grinding Disc (25 Pack)
- ATD-87336 - 3" Aluminum Oxide 36 Grit Grinding Disc (25 Pack)
- ATD-87350 - 3" Aluminum Oxide 50 Grit Grinding Disc (25 Pack)

ZIRCONIA GRINDING DISCS

Features:

- Longer lasting than aluminum oxide
- Self-sharpen with use
- Excellent for pre-paint surface preparation
- For use with ATD-6601 2" disc holder and ATD-6602 3" disc holder



Also Available:

- ATD-88236 - 2" Zirconia 36 Grit Grinding Disc (25 Pack)
- ATD-88250 - 2" Zirconia 50 Grit Grinding Disc (25 Pack)
- ATD-88336 - 3" Zirconia 36 Grit Grinding Disc (25 Pack)
- ATD-88350 - 3" Zirconia 50 Grit Grinding Disc (25 Pack)

GREEN ZIRCONIA GRINDING DISCS

Features:

- Hardest grain for high temp alloys, stainless steel & titanium
- Perfect for sanding, grinding & breaking edge applications
- Self-sharpening grain improves life
- Disperses heat better than other grains
- For use with ATD-6601 2" disc holder and ATD-6602 3" disc holder



Also Available:

- ATD-89224 - 2" Green Zirconia 24 Grit Grinding Disc (25 Pack)
- ATD-89236 - 2" Green Zirconia 36 Grit Grinding Disc (25 Pack)
- ATD-89250 - 2" Green Zirconia 50 Grit Grinding Disc (25 Pack)
- ATD-89324 - 3" Green Zirconia 24 Grit Grinding Disc (25 Pack)
- ATD-89336 - 3" Green Zirconia 36 Grit Grinding Disc (25 Pack)
- ATD-89350 - 3" Green Zirconia 50 Grit Grinding Disc (25 Pack)

ATDPB26DD3P 3 PHASE SIDE DOWN DRAFT PAINT SPRAY BOOTH

ATDPB26DD3P (3 PHASE)
ATDPB26DD1P (1 PHASE)

Features:

- Commercial grade hip panel design with control panel
- High quality intake and exhaust filters
- Tri-fold and personnel doors with viewing windows
- Powder coated finish (inside and outside)
- (10) High quality UL listed lighting fixtures (light bulbs included)
- 5/16" nut and bolt installation
- (2) 8 ft. exhaust chimney stack assemblies
- Precision punched 18 Ga. panel construction
- (2) Dayton tube-axial fan - 2 Hp, 3PH
- Canopy plenum kit (optional)

Specifications:

- Inside Dimensions: 26' L x 14' W x 9'-3" H
- Outside Dimensions: 26'-4" L x 17'-8" W x 9'-5" H
- Fan/Motor: (2) 24" Tube-Axial Fan; 2 Hp, 3PH, 230/460V AC, 60 Hz; Non-Spark, NEMA Rated
- CFM: 14,000 @ .5 Static Pressure
- Lighting: (10) T-8 Light Fixtures, (4) Bulbs
- Canopy plenum kit (optional)
- 9 ft. exhaust duct kit (optional)



ATDPB23CF3P 3 PHASE CROSS FLOW DRAFT PAINT SPRAY BOOTH

ATDPB23CF3P (3 PHASE)
ATDPB23CF1P (1 PHASE)

Features:

- Tilt panel design for optimal lighting coverage
- High quality UL listed lighting fixtures (light bulbs included)
- Personnel door with viewing window
- High quality intake and exhaust filters
- Powder coated finish (inside and outside)
- 5/16" bolt and nut installation
- Precision punched panels on 6 ft. centers
- All connection and mounting hardware
- Control panel
- Fan motor and door limit switches

Specifications:

- Inside Dimensions: 22'-6" L x 13' W x 8'-6" H
- Outside Dimensions: 25'-4" L x 13'-4" W x 8'-10" H
- Fan/Motor: 24" Tube-Axial Fan; 3 Hp, 3PH, 230/460V AC, 60 Hz; Non-Spark, NEMA Rated
- CFM: 9,500 @ .5 Static Pressure
- Lighting: (6) T-8 Light Fixtures, (4) Bulbs



ATDPB26SDD3P 3 PHASE SEMI DOWN DRAFT PAINT SPRAY BOOTH

ATDPB26SDD3P (3 PHASE)
ATDPB26SDD1P (1 PHASE)

Features:

- Commercial grade hip panel design with control panel
- High quality intake and exhaust filters
- Tri-fold and personnel doors with viewing windows
- Powder coated finish (inside and outside)
- (10) High quality UL listed lighting fixtures (light bulbs included)
- 5/16" nut and bolt installation
- Precision punched 18 Ga. panel construction
- Dayton tube-axial fan - 3 Hp, 3PH
- Precision punched 18 Ga. panel construction
- Canopy plenum kit (optional)
- 9 ft. exhaust duct kit (optional)

Specifications:

- Inside Dimensions: 26' L x 14' W x 9'-3" H
- Outside Dimensions: 26'-4" L x 14'-4" W x 9'-7" H
- Fan/Motor: 30" Tube-Axial Fan; 3 Hp, 3PH, 230/460V AC, 60 Hz; Non-Spark, NEMA Rated
- CFM: 12,200 @ .5 Static Pressure
- Lighting: (10) T-8 Light Fixtures, (4) Bulbs



ATDPBH3P DIRECT FIRED HEATING SYSTEM

ATDPBH3P (3 PHASE)
ATDPBH1P (1 PHASE)

Features:

- Variflow Technology
- Exhaust VFD fused and wired
- Vertical/side discharge configuration
- Single point connection
- White powder coat finish
- ETL listed control panel
- Exhaust VFD fused and wired
- Hour meter
- Time display shows cycle time and elapsed time
- Truly variable air flow
- Interlock status indicator lights
- 30 ft. umbilical cord
- Easy-to-use controls with control panel messages
- Includes vertical stand/filter box

Specifications:

- Fuel: NG or LP
- BTUH: 1.2M
- Gas Train: 1"
- CFM: 13,000
- Gas Pressure: 1,715 lbs.
- Intake Motor: 230V, 10 Hp, 3PH
- Exhaust VFD: 230V, 5 Hp, 3PH
- Ship Weight: 1,395 lbs
- Package Size: 98" L x 65" W x 54" H





160 Enterprise Drive | Wentzville, MO 63385 | www.atdtools.com

©2025 ATD Tools, Inc. All rights reserved. Trademarks of companies mentioned herein appear for identification purposes only and are the property of their respective companies.

